
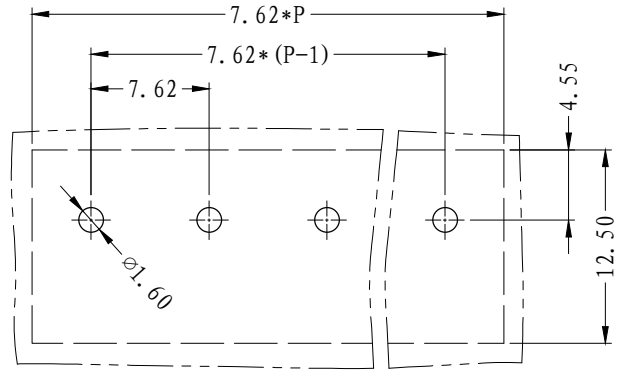
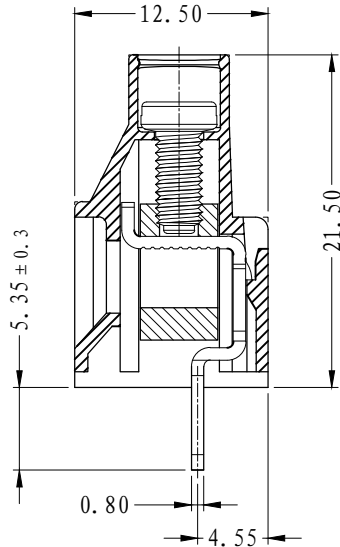
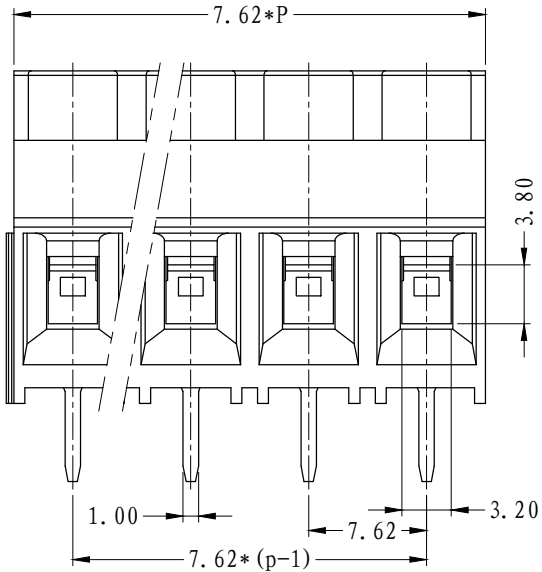


| REVISION                                                                            |         | RECORD |      |
|-------------------------------------------------------------------------------------|---------|--------|------|
| REV.                                                                                | CONTENT | MOD.   | DATE |
|  | 新发行     |        |      |

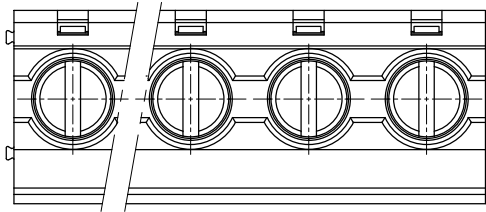

NOTES:  
Pitch : 7.62mm  
Rated Voltage : 300V  
Rated Current : 30 A  
Withstand Voltage :  
AC2500V for 1 minute  
Using Temperature Range :  
-40℃ ~ +105℃  
Wire range : 24~10 AWG  
Screw Torque Value : 0.5Nm

技术要求:  
间距: 7.62mm  
额定电压: 300V  
额定电流: 30A  
耐压值: AC2500V/min  
使用条件: -40℃~+105℃  
适用线规: 24~10 AWG  
螺丝扭矩: 0.5Nm

|                | pitch dimension |        |         | Nominal dimension |         |         |          |          | —                                                                                   |
|----------------|-----------------|--------|---------|-------------------|---------|---------|----------|----------|-------------------------------------------------------------------------------------|
|                | over 0          | over 6 | over 10 | over 0            | over 30 | over 60 | over 100 | over 150 |                                                                                     |
| variable range | to 6            | to 10  | to 24   | to 30             | to 60   | to 100  | to 150   |          |  |
| Tolerance      | ±0.1            | ±0.15  | ±0.25   | ±0.2              | ±0.3    | ±0.5    | ±0.7     | ±1.0     | 0.05/10                                                                             |

|         |                    |              |          |                    |         |
|---------|--------------------|--------------|----------|--------------------|---------|
| 4       | LG636-铜方块          | F1A0BLG6363V | P        | 黄铜                 | 镀镍      |
| 3       | M3*6.6(一字)         | SPOYA306601V | P        | 碳钢                 | 三价铬钝化彩锌 |
| 2       | LG636-焊脚           | 2003B0001AV  | P        | 黄铜                 | 镀雾锡     |
| 1       | LG762-7.62-本体(带拼接) | 2017A0YXXAVP | 1        | PA66-V0            |         |
| NO.     | NAME OF PART       | NO. OF PART  | Q'TY     | MATERIAL           | NOTES   |
| DES.    | CMZ                | DATE         | 24.12.05 | UNITS              | MM      |
| CHK.    |                    | DATE         |          | SIZE               | A4      |
| APP.    |                    | DATE         |          | SCALE              | 1:1     |
| DWG NO. |                    |              |          | SP-2-2017001       | REV: V0 |
| TITLE   |                    |              |          | LG762-7.62-成品(带拼接) |         |