
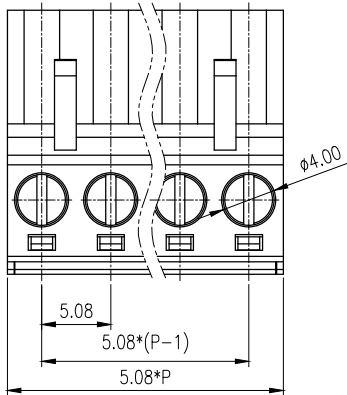
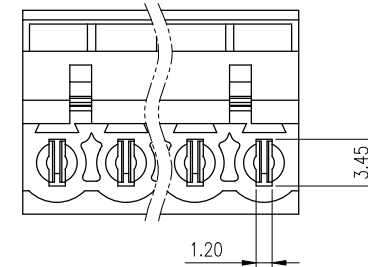
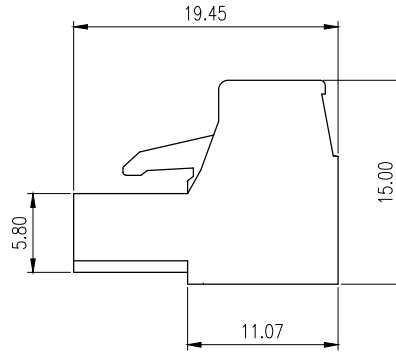


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		



技术要求:

1. 额定电压: 380V, 额定电流: 25A
2. 间距: 5.08mm
3. 耐电压值: AC 2500V/min
4. 使用条件: -40℃ ~ +105℃
5. 适用线规: 24 ~ 12AWG
6. 螺丝扭力: 0.5 N.m
7. 剥线长度: 7mm

NOTES:

1. Voltage Rating: 380V, Current Rating: 25A
2. PITCH: 5.08mm
3. Insulation Withstands Voltage: AC2500V/min
4. Using Temperature Range: -40℃ ~ +105℃
5. Suitable Electric Wire: 24 ~ 12AWG
6. Screw Torque Value: 0.5 N.m
7. Strip Length: 7mm

XXXX-XX-XXP-1Y (颜色)

10: 灰色 11: 浅灰色
20: 蓝色 30: 黑色
40: 绿色 50: 橙色
52: 黄色 60: 红色
70: 透明 80: 茶色
90: 白色 91: 乳白色
两个颜色时, 用"/"隔开;
130/140

	pitch dimension			Nominal dimension					— □ ○
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5.	LC7-5.08-夹子	1275B0001AV	P	紫铜	镀亮锡
4.	LC1-5.08-铜方块	F1A0BLC5083V	P	黄铜	镀镍
3.	LC1-5.08-螺丝	SPOYA305302V	P	碳钢	三价铬钝化彩锌
2.	LC1-5.08-盖子	1001C0YXXAV	1	PA66-V0	
1.	LC7-5.08-主体	1275A0YXXAV	1	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES
DES.	CMZ	DATE	25/04/21	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
THIRD ANGLE PROJECTION				SHEET	
DWG NO.				SP-2-1001002	
REV: V0				1 of 1	
TITLE				LC7-5.08-XXP-1Y-00A	
				LC7-5.08-成品	



上海联捷电气有限公司
Shanghai Elinker Electric CO., LTD