

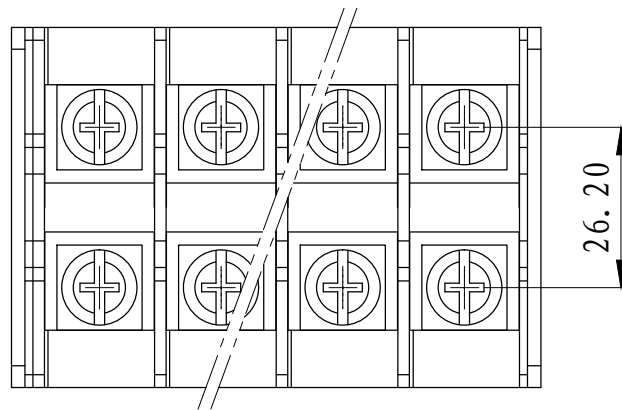


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

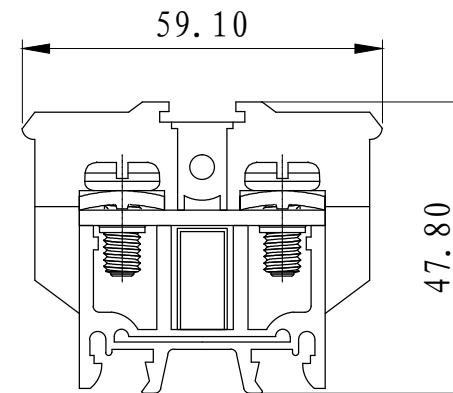

技术要求:
极数: 组装
额定电压: 660V
额定电流: 100A
螺钉类型/扭力: M6/2.5 N.m
绝缘材料类型: PC
阻燃等级: V0
刚柔性导线: 25mm²

备注: 端子上面有透明(防护罩)

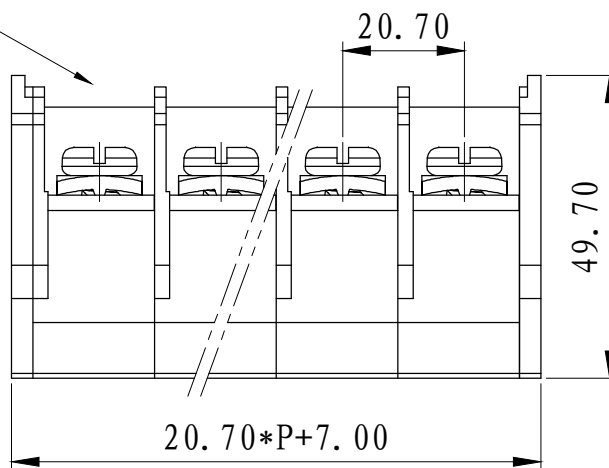

	pitch dimension			Nominal dimension					— /
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		◇ ⌒
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	JHY1-100A罩盖	6010C000100	1	PC	透明
4	TR-80A螺丝	SSD0600010V	2P	碳钢	镀镍
3	JHY1-100A导电件	6010B00010V	P	H62	镀镍
2	JHY1-100A端板	6010C30XXAV	2	PC	黑色
1	JHY1-100A本体	6010A30XXAV	P	PC	黑色
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	CMZ	DATE 2025/01/16	UNITS mm	THIRD ANGLE PROJECTION	
CHK.		DATE	SIZE A4	1 of 1	
APP.		DATE	SCALE 1:1	DWG NO. 6010A30	REV: T0
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	JHY1-100A-XX-130-00A
					JHY1-100A-成品