



REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

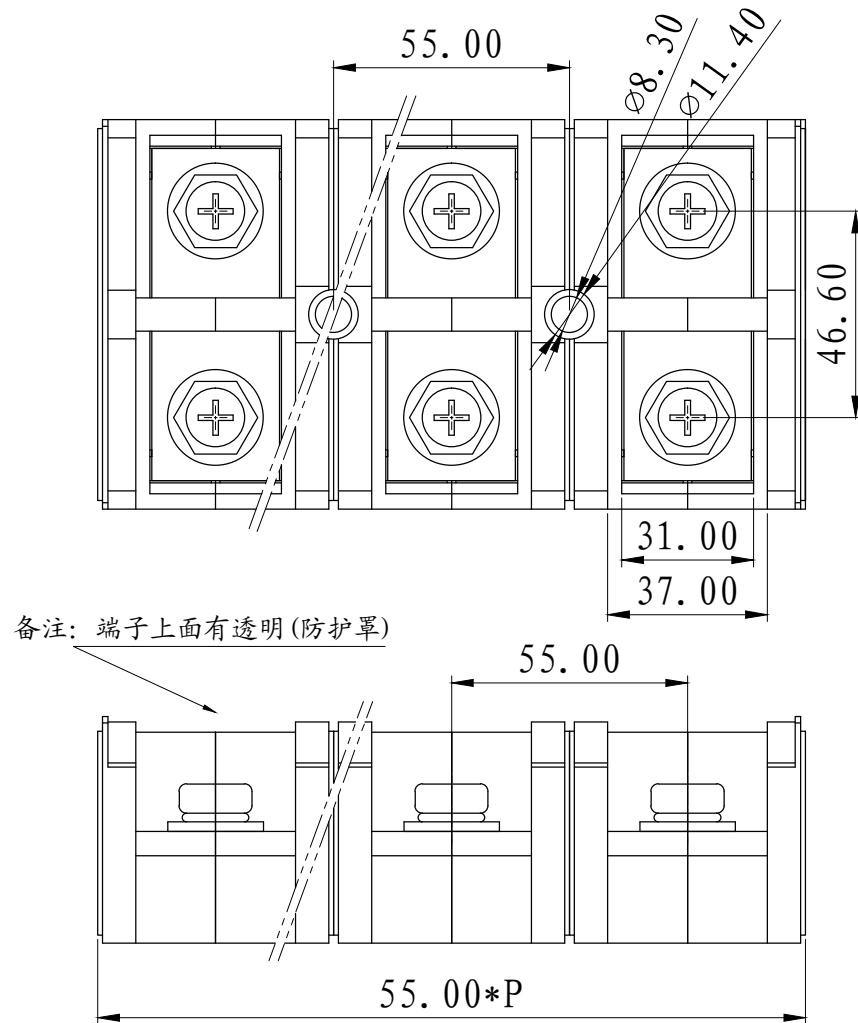

技术要求:
极数: 组装
额定电压: 660V
额定电流: 300A
螺钉类型/扭力: M10/4.0 N.m
绝缘材料类型: PC
阻燃等级: V0
刚柔性导线: 150mm²

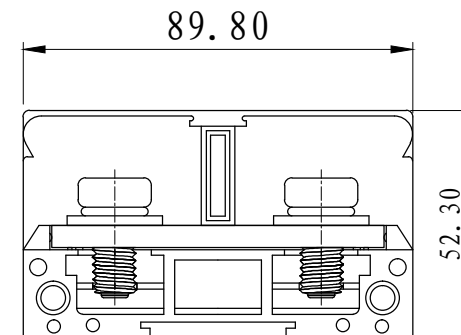

	pitch dimension			Nominal dimension					— /
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		— /
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

7	JHY1-300A罩盖	6044C00010V	1	PC	透明
6	M4螺母	SNM0400010V	2	黄铜	镀镍
5	M4螺杆	L000400010V	2	铁	镀锌
4	IN200BK-螺丝	SSD0100010V	2P	碳钢	镀锌
3	JHY1-300A导电件	6044B00010V	P	H62	镀镍
2	JHY1-300A端板	6044C30XXAV	2	PC	黑色
1	JHY1-300A本体	6044A30XXAV	2P-2	PC	黑色
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	CMZ	DATE 2025/01/16	UNITS mm	THIRD ANGLE PROJECTION	
CHK.		DATE	SIZE A4		SHEET 1 of 1
APP.		DATE	SCALE 1:1		REV: T0
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	JHY1-300XX-130-00A JHY1-300A成品