
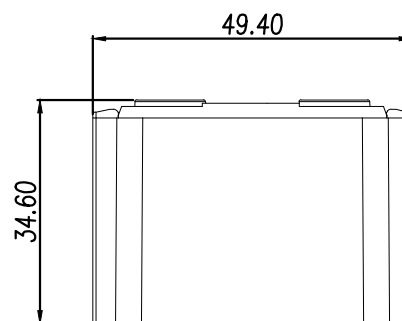
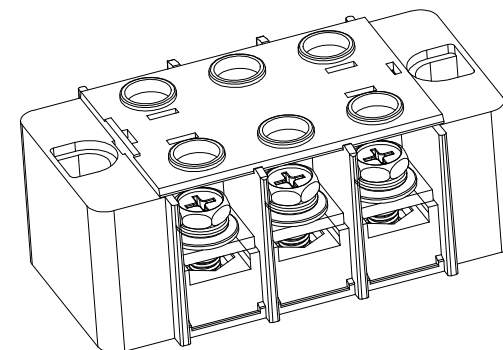
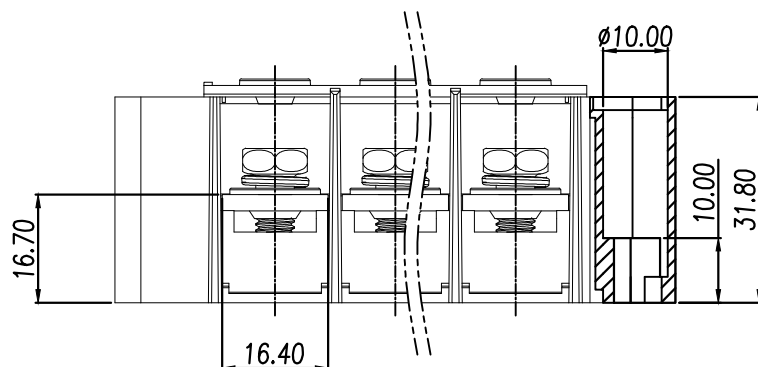


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

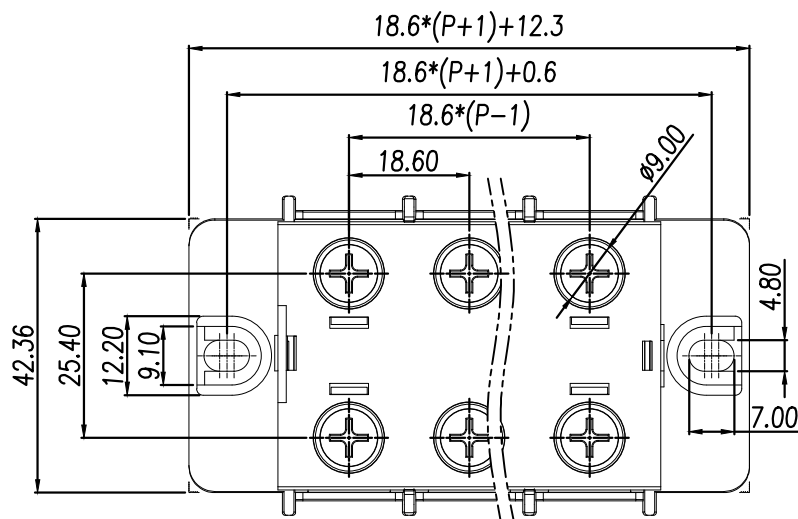

技术要求:

额定电压: 600V

额定电流: 100A

螺钉类型/扭力: M6/2.5 N.m

绝缘材料类型: PC

阻燃等级: V0

导线截面: 25mm² max

	pitch dimension			Nominal dimension					— □ ○
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	标记条		1	A4膜纸	空白
4	6*12-14圆三铁外六角+字	6*12-14圆三铁外六角+字	2P	碳钢	镀蓝白锌
3	JH9-100ADDJ-导电件	JH9-100A导电件	P	黄铜	镀镍
2	TB1-100XX-A盖板	6TB1C70XX000V	1	PC	透明
1	TB1-100XX-A主体	6TB1A30XX000V	1	PC	黑色
NO.	NAME OF PART	NO. OF PART	QTY	MATERIAL	NOTES
DES.	CMZ	DATE 2025/05/21	UNITS mm	THIRD ANGLE PROJECTION	
CHK.		DATE	SIZE A4	SHEET 1 of 1	
APP.		DATE	SCALE 1:1	DWG NO.	SP-2-6TB100i REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	TB1-100XX-A-130-00A TB1-100XX-A成品