

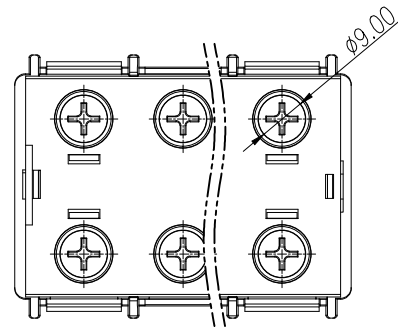


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

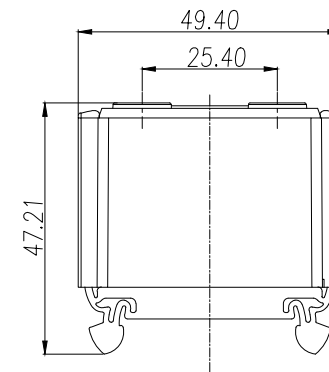

技术要求:
 额定电压: 600V
 额定电流:100A
 螺钉类型/扭力: M6/2.5N.m
 绝缘材料类型: PC
 阻燃等级: V0
 导线截面: 25mm² max

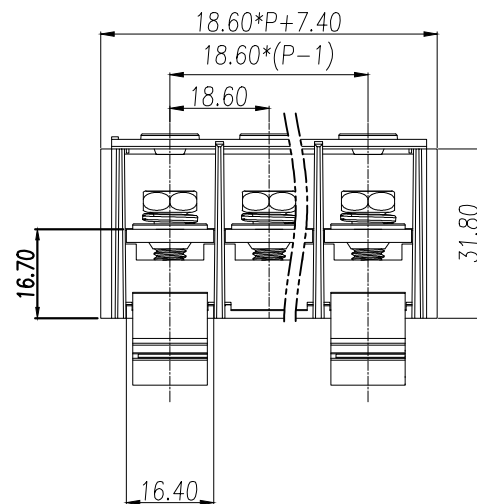

	pitch dimension			Naminl dimension					—
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
	6	10	24	30	60	100	150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	KJ44-卡脚	6TB1J300653V	2P	PA66	黑色
5	标记条		1	A4腹膜纸	空白
4	6*12-14圆三铁外六角+字	6*12-14圆三铁外六角+字	2P	碳钢	镀蓝白锌
3	JH9-100ADDJ-导电件	JH9-100A导电件	P	黄铜	镀镍
2	TB1-10003-A盖板	6TB1C70XX000V	1	PC	透明
1	TB1-10003-II主体	6TB1A30XX000V-1	1	PC	黑色
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	CMZ	DATE 2025/05/19	UNITS mm	THIRD ANGLE PROJECTION	
CHK.		DATE	SIZE A4		SHEET 1 of 1
APP.		DATE	SCALE 1:1	DWG NO.	SP-2-6TB100K REV: V0
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	TB1-100XX-H-130-00A
					TB1-100XX-H成品