
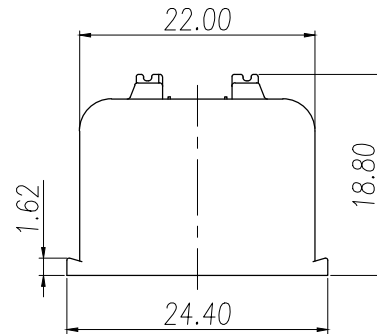
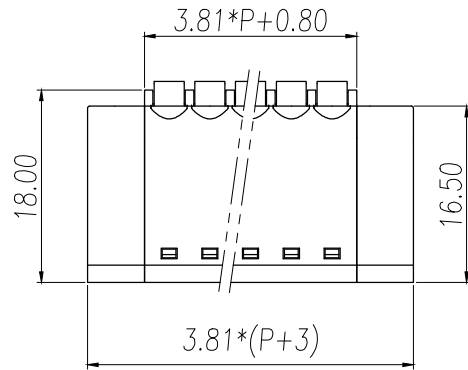



REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

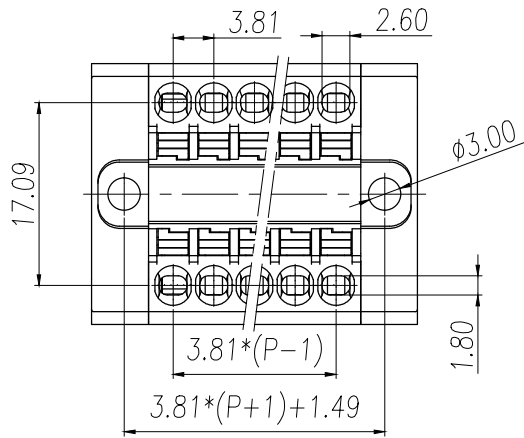

NOTES:
 Pitch : 3.81mm
 Rated Voltage : 300V
 Rated Current : 15A
 Withstand Voltage :
 AC2500V for 1 minute
 Using Temperature Range :
 - 40℃ ~ + 105℃
 Wire range : 24~ 16AWG
 Stripping length: 10mm

技术要求:
 间距: 3.81mm
 额定电压: 300V
 额定电流: 15A
 耐电压值: AC2500V/min
 使用条件: -40℃~+105℃
 适用线规: 24~16AWG
 剥线长度: 10mm

	pitch dimension			Nominal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	— ▱ ⌒
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	LD2-1.5耳朵		6LD2I400203V		2	PA66-V0		
5	LD2-1.5导电件		1181B0010AV		P	黄铜	镀镍	
4	LC6-3.81-弹片		F2A0DLC638BV		2P	不锈钢		
3	LC6-3.81-按钮		1043D0YXXAV		2P	PA66-V0		
2	LD2K-1.5-盖板		1181C0YXXAV		1	PA66-V0		
1	LD2-1.5-本体		1181A0YXXAV		1	PA66-V0		
NO.	NAME OF PART		NO. OF PART		Q' TY	MATERIAL	NOTES	
DES.	CMZ	DATE	2025/05/19	UNITS	MM	THIRD ANGLE PROJECTION		SHEET
CHK.		DATE		SIZE	A4			1 of 1
APP.		DATE		SCALE	1:1	DWG NO.	SP-1-1181140	REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric C O.,LTD						TITLE	LDM1-1.5-XXP-1Y-00A	
							LDM1-1.5-成品	