



	pitch dimension			Nominal dimension					—
variable range	over	over	over	over	over	over	over	over	
	0	6	10	0	30	60	100	150	
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

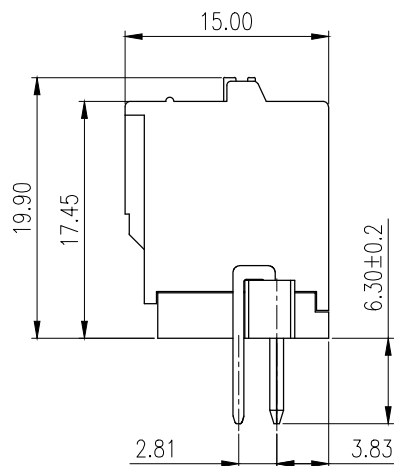

技术要求2:

1. 间距: 5.08mm
2. 耐电压值: AC2500V/min
3. 绝缘阻抗: 500M Ω /DC500V
4. 使用条件: -40℃~+105℃

	pitch dimension			Nominal dimension					—
variable range	over	over	over	over	over	over	over	over	
	0	6	10	0	30	60	100	150	
	to	to	to	to	to	to	to		
	6	10	24	30	60	100	150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

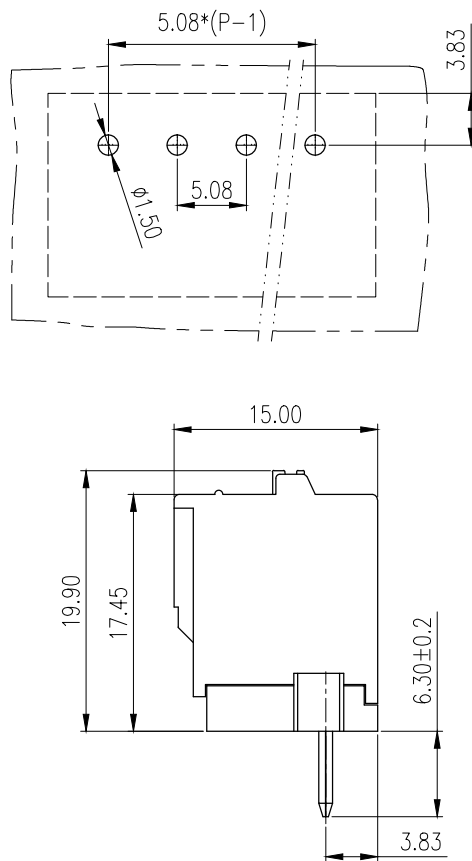


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

4. Using Temperature Range : - 40°C ~ + 105°C

2. 适用线规: 24~12AWG

4. 使用条件: $-40^{\circ}\text{C}\sim+105^{\circ}\text{C}$

5	LC60-5.08五金件		2083B0001AV		P	磷青铜	镀锡	
4	LC6-5.08-弹片		F2A0DLC658BV		p	不锈钢		
3	LC6-5.08-按钮		1020D0Y01AV		P	POM		
2	LS242V/R-5.08-盖板		2080C0YXXAV		1	PA66		
1	LC6-5.08-本体		1020A0YXXAV		1	PA66		
NO.	NAME OF PART		NO. OF PART		Q' TY	MATERIAL	NOTES	
DES.	陈明珠	DATE	2025/06/10	UNITS	MM	THIRD ANGLE PROJECTION		SHEET
CHK.		DATE		SIZE	A4			1 of 1
APP.		DATE		SCALE	1: 1	DWG NO.	SP-2-2080002	REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric C O.,LTD						TITLE	LS242V1-5.08-XXP-1Y-00A	
							LS242V1-5.08-成品	