
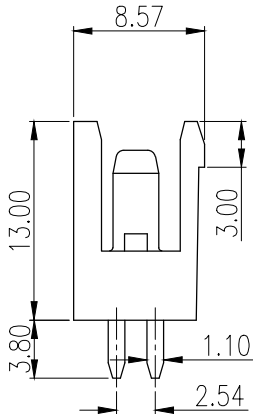
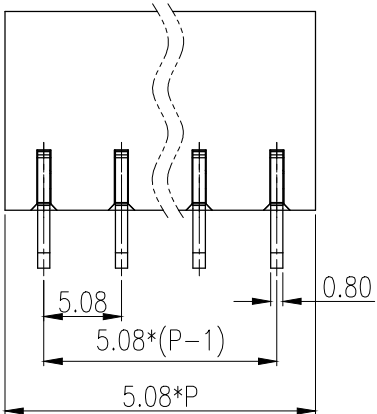
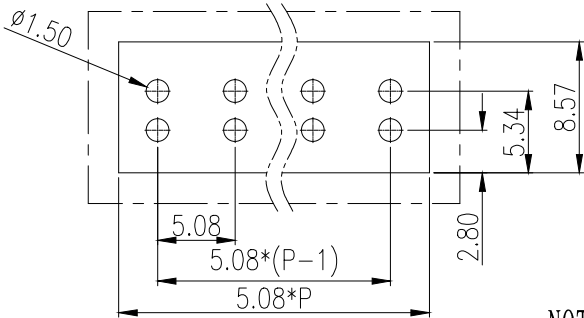


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

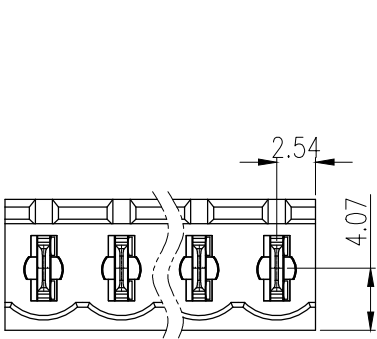

- NOTES:
1. Voltage Rating: 380V, Current Rating: 25A
 2. PITCH: 5.08mm
 3. Insulation Withstands Voltage: AC2500V/min
 4. Using Temperature Range: -40℃ ~+105℃

- 技术要求:
1. 额定电压: 380V, 额定电流: 25A
 2. 间距: 5.08mm
 3. 耐电压值: AC 2500V/min
 4. 使用条件: -40℃ ~+105℃

XXXX-XX-XXP-1Y (颜色)
10: 灰色 11: 浅灰色
20: 蓝色 30: 黑色
40: 绿色 50: 橙色
52: 黄色 60: 红色
70: 透明 80: 茶色
90: 白色 91: 乳白色
两个颜色时, 用"/"隔开;
130/140

2.	LZ7H-5.08V针	1277B0002AV	1	紫铜	镀亮锡
1.	LZ7HK-5.08-主体	1277K0YXXAV	1	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES
DES.	CMZ	DATE	25/06/30	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
DWG NO.				SP-2-1001002	REV: V0
TITLE				LZ7HVK-5.08-XXP-1Y-00A	1 of 1
				LZ7HVK-5.08-成品	

	pitch dimension			Naminal dimension					— /
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10



上海联捷电气有限公司
Shanghai Elinker Electric CO.,LTD

TITLE

LZ7HVK-5.08-XXP-1Y-00A
LZ7HVK-5.08-成品