


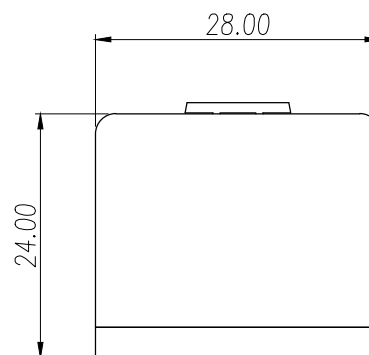

技术要求:

极数: 组装

额定电压: 600V

额定电流: 20-41A

螺钉类型/扭力: M3/0.5N.m

绝缘材料类型: PA66


阻燃等级: V0

线径: 0.2-4mm²

使用条件: -40℃~+105℃

剥线长度: 7mm

	pitch dimension			Nominal dimension					—
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
	to	to	to	to	to	to	to		
	6	10	24	30	60	100	150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	ZB6-标记条				P/10				
5	H3803B导电件		6H38B00041AV		P	紫铜		镀镍	
4	UK5N-铜方块		F000000140V		2P	黄铜		镀镍	
3	UK2.5B-螺丝		SSM0300070V		2P	碳钢		镀镍	
2	H3803-盖板		4017C0YXXAV		1	PA66-V0			
1	H3803-本体		4017A0YXXAV		1	PA66-V0			
NO.	NAME OF PART		NO. OF PART		Q' TY	MATERIAL		NOTES	
DES.	CMZ	DATE	2025/02/13	UNITS	MM	THIRD ANGLE PROJECTION			SHEET
CHK.		DATE		SIZE	A4				1 of 1
APP.		DATE		SCALE	1:1	DWG NO.	SP-1-H380350	REV: V0	
 上海联捷电气有限公司 Shanghai Elinker Electric Co., LTD						TITLE		H3803B-XXP-1Y-00A	
								H3803B-成品	