

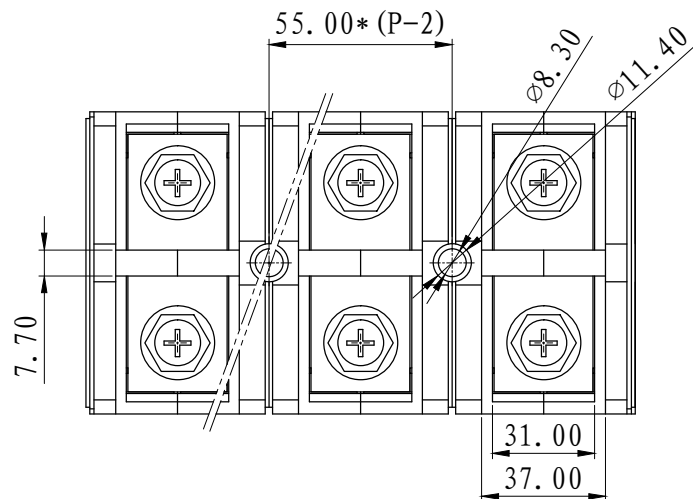


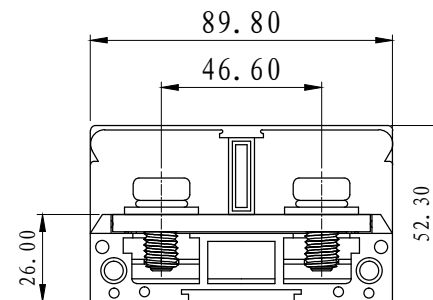

备注: 端子上面有透明(防护罩)

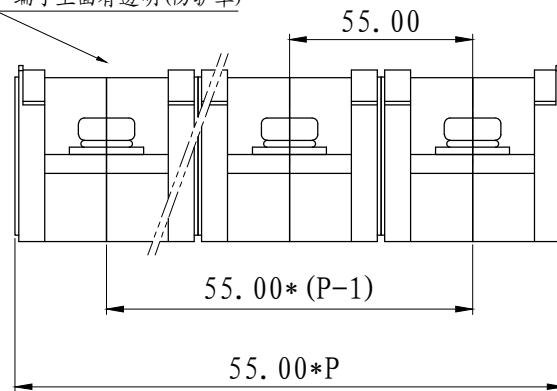

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

技术要求:
极数: 组装
额定电压: 800V
额定电流: 300A
螺钉类型/扭力: M10/4.0
绝缘材料类型: PC
阻燃等级: V0
刚柔性导线: 150mm²

	pitch dimension			Nominal dimension					— /
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

9	TC2-300A罩盖	6TC2C703000V	1	PC	透明	
8	M4螺母	SM00A000001V	2	黄铜	镀锌	
7	M4螺杆	SG00A400001V	2	铁	镀锌	
6	IN200BK-螺丝	SPBSA102001V	2P	碳钢	镀锌	
5	JHY1-300A导电件	6JHYBDD3003V	P	H62	镀镍	
4	JHY1-300Z凸壳	6JHYC303000V-2	1	PC	黑色	
3	JHY1-300Z凹壳	6JHYC303000V-1	1	PC	黑色	
2	JHY1-300A凸壳	6JHYA303000V-2	P-1	PC	黑色	
1	JHY1-300A凹壳	6JHYA303000V-1	P-1	PC	黑色	
NO. NAME OF PART		NO. OF PART		Q'TY	MATERIAL	NOTES
DES.	CMZ	DATE	2025/08/19	UNITS	mm	THIRD ANGLE PROJECTION
CHK.		DATE		SIZE	A4	 SHEET
APP.		DATE		SCALE	1:1	DWG NO. 6044A30 REV: T0
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD					TITLE	TC2-300XX
						TC2-300A成品