



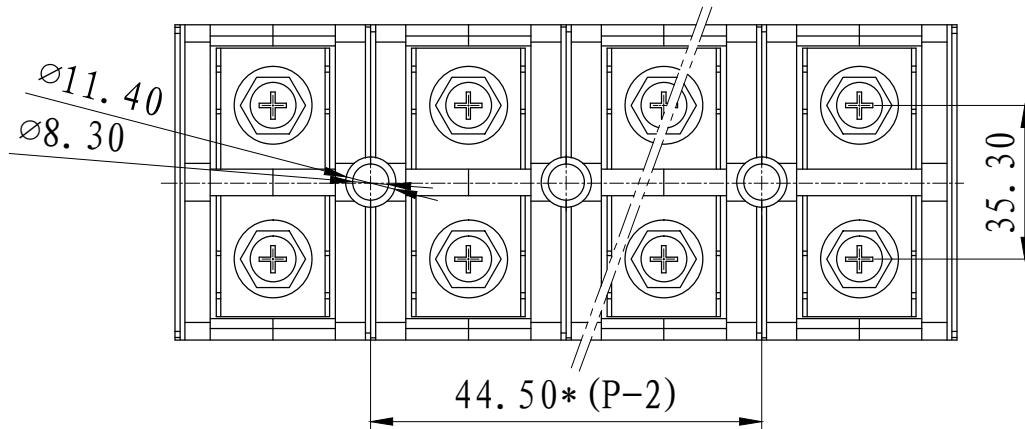


备注：端子上面有透明(防护罩)

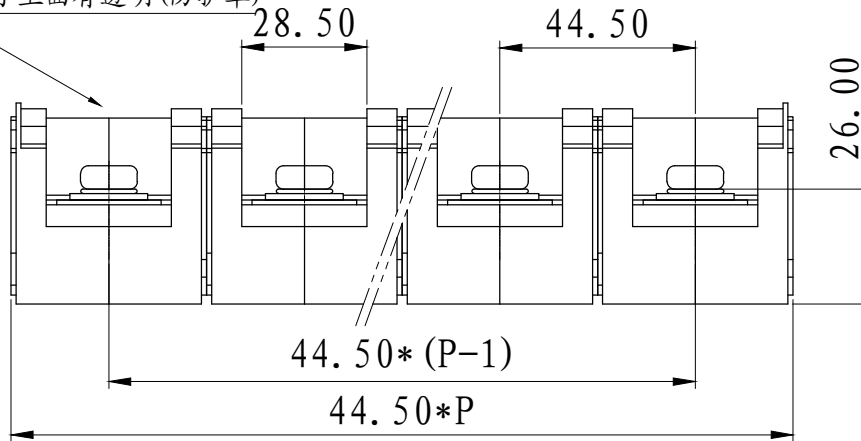

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

技术要求：
极数：组
额定电压：660V
额定电流：200A
螺钉类型/扭力：M8/3.5
绝缘材料类型：PC
阻燃等级：V0
刚柔性导线：70mm²

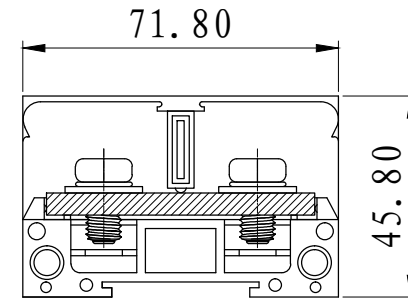

	pitch dimension			Nominal dimension					
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	TC2-200A罩盖	6036C00010V	1	PC	透明
4	IN100BK-螺丝	SSD0800030V	2P	碳钢	镀锌
3	TC2-200A导电件	6036B00010V	P	H62	镀镍
2	TC2-200A端板	6036C30XXAV	2	PC	黑色
1	TC2-200A本体	6036A30XXAV	2P-2	PC	黑色
NO.	NAME OF PART	NO. OF PART	QTY	MATERIAL	NOTES
DES.	CMZ	DATE 2025/08/19	UNITS mm	THIRD ANGLE PROJECTION	
CHK.		DATE	SIZE A4	SHEET 1 of 1	
APP.		DATE	SCALE 1:1	DWG NO.	6036A30 REV: T0
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TC2-200XX	
				TITLE TC2-200A成品	