



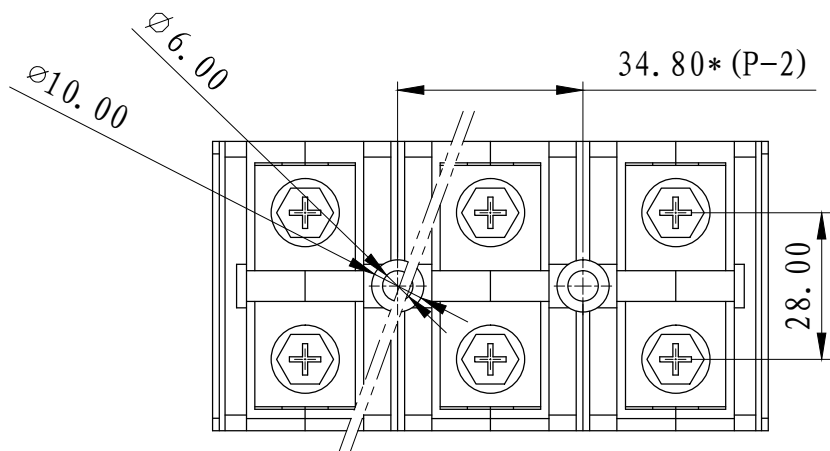


备注：端子上面有透明(防护罩)

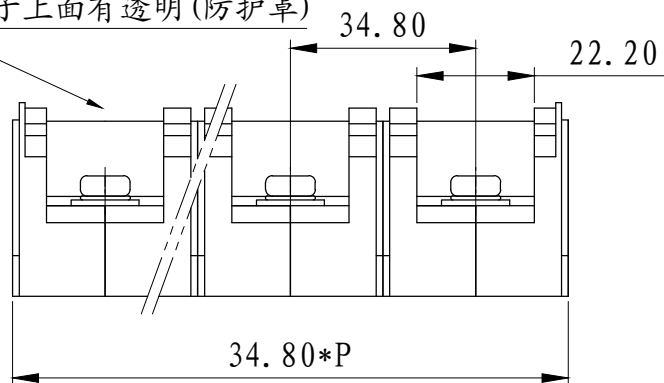

	pitch dimension			Nominal dimension					— /
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

技术要求：
极数： 组装
额定电压： 660V
额定电流： 100A
螺钉类型/扭力： M6/2.5N.m
绝缘材料类型： PC
阻燃等级： V0
刚柔性导线： 25mm²

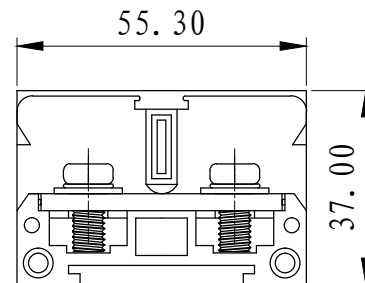

8	TC2-100A-罩盖	6TC2C701001V	1	PC	透明
7	M3螺母	SW00A300003V	2	黄铜	镀镍
6	M3螺杆	L000A300001V	2	铁	镀锌
5	TC2-60A-螺丝	SPBSA6012G1V	2P	碳钢	镀锌
4	TC2-100A-导电件	6TC2B00100AV	P	黄铜	镀镍
3	TC2-100Z-挡板	6TC2G301000V	2	PC	黑色
2	TC2-100A-凸壳	6TC2E301000V-2	P	PC	黑色
1	TC2-100A-凹壳	6TC2E301000V-1	P-2	PC	黑色
NO. NAME OF PART		NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	CMZ	DATE 2025/08/19	UNITS mm	THIRD ANGLE PROJECTION	
CHK.		DATE	SIZE A4	1 of 1	
APP.		DATE	SCALE 1:1	DWG NO. 6045A30	REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	TC2-100XX
					TC2-100A成品