

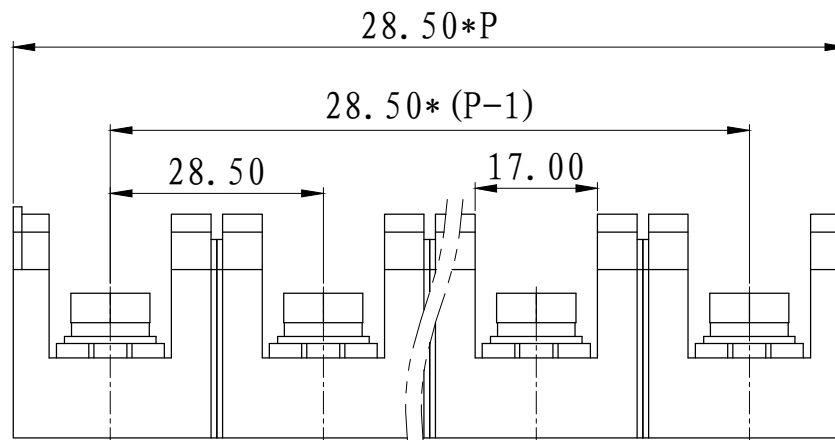


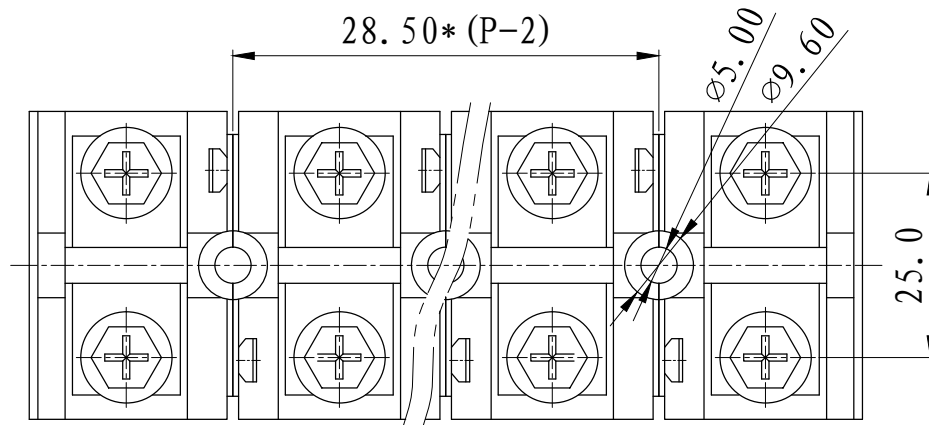

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

技术要求:
 极数: 组装
 额定电压: 660V
 额定电流: 60A
 螺钉类型/扭力: M6/2.5
 绝缘材料类型: PC
 阻燃等级: V0
 刚柔性导线: 10mm²

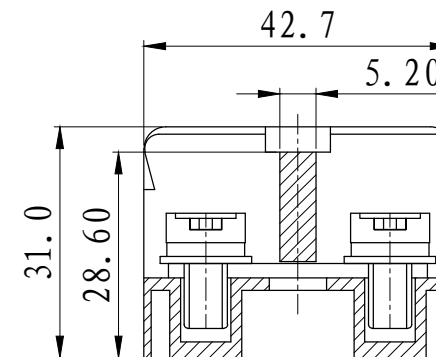

	pitch dimension			Nominal dimension					— ▧ ⌒
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	TC2-60A罩盖	6018C000100	1	PC	透明
4	TC2-60A螺丝	SSD0600020V	2P	碳钢	镀镍
3	TC2-60A导电件	6018B00010V	2P	黄铜	镀镍
2	TC2-60A端板	6018C30XXAV	2	PC	黑色
1	TC2-60A本体	6018A30XXAV	P-2	PC	黑色
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	CMZ	DATE 2025/08/19	UNITS mm	THIRD ANGLE PROJECTION	
CHK.		DATE	SIZE A4	1 of 1	
APP.		DATE	SCALE 1:1	DWG NO. 6018A30	REV: T0
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	TC2-60XX
					TC2-60A成品