



REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

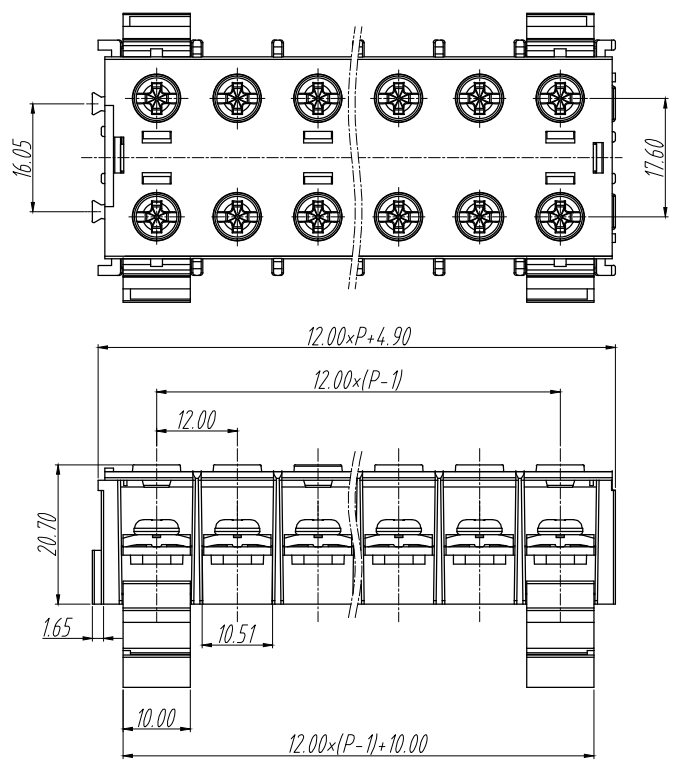

NOTES:
Pitch : 12.0mm
Rated Voltage : 600V
Rated Current : 25A
Withstand Voltage :
AC3000V for 1 minute
Using Temperature Range :
- 40 ~ + 105
Suitable Electric Wire: 22-14 AWG
Screw Torque Value : M4/1.2Nm

技术要求:
间距: 12.0mm
额定电压: 600V
额定电流: 25A
耐电压值: AC3000V/min
使用条件: -40℃~+105℃
适用线规: 22-14 AWG
螺丝扭矩: M4/1.2Nm

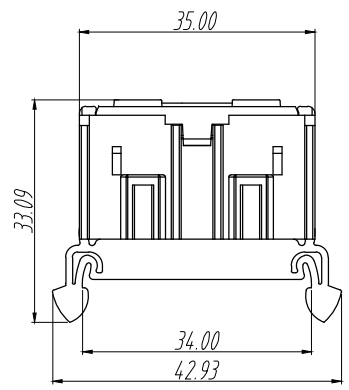

	pitch dimension			Nominal dimension					— —
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150		
variable range									
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

7	DG-L-C45/2米	6JH9LDG0001V	1	铝	
6	KJ32-卡脚	6TB1J300253V	2	PA66-V0	黑色
5	标记条		1	A4腹膜纸	
4	M5*10-12*12螺丝	SPFFB501093V	2P	合金铜	镀镍
3	TA-40A-C导电件	6TB1BDD040AV-1	P	黄铜	镀镍
2	TB1-25-H盖板	6TB1C302050V-H	1	PC	透明
1	TB1-25-H主体	6TB1E302050V-H	1	PC	黑色
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	CMZ	DATE 2025/08/26	UNITS mm	THIRD ANGLE PROJECTION	
CHK.		DATE	SIZE A4	1 of 1	
APP.		DATE	SCALE 1:1	DWG NO.	SP-1-6TB1H25 REV: V0
				TITLE	TB1-25XX-H-1Y-00A
					TB1-25XX-H成品