

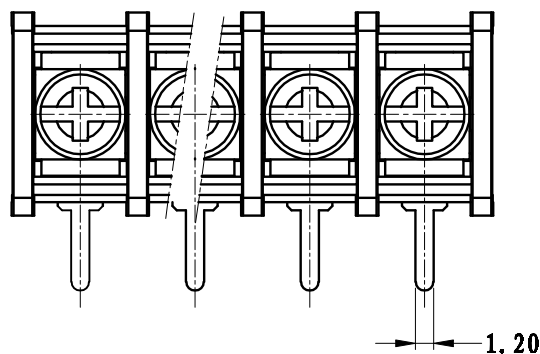
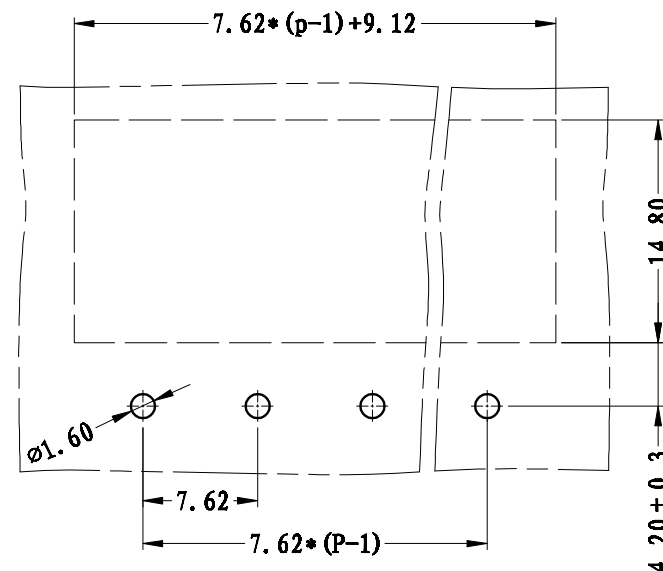


REVISION		RECORD	
REV.	CONTENT	MOD.	DATE
①	初版发行		

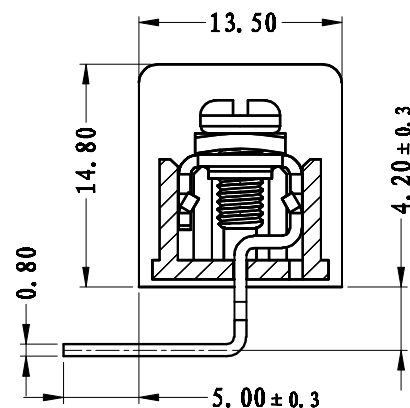

NOTES:
Pitch : 7.62mm
Rated Voltage : 300V
Rated Current : 15 A
Withstand Voltage :
AC2500V for 1 minute
Insulation Resistance :
5MΩ / DC500V
Using Temperature Range :
- 40℃ ~ + 130℃
Wire range : 22~14 AWG
Screw Torque Value : 0.5Nm

技术要求:
间距: 7.62mm
额定电压: 300V
额定电流: 15A
耐电压值: AC2500V/min
绝缘阻抗: 5MΩ/DC500V
使用条件: -40℃~+130℃
适用线规: 22~14 AWG
螺丝扭矩: 0.5Nm

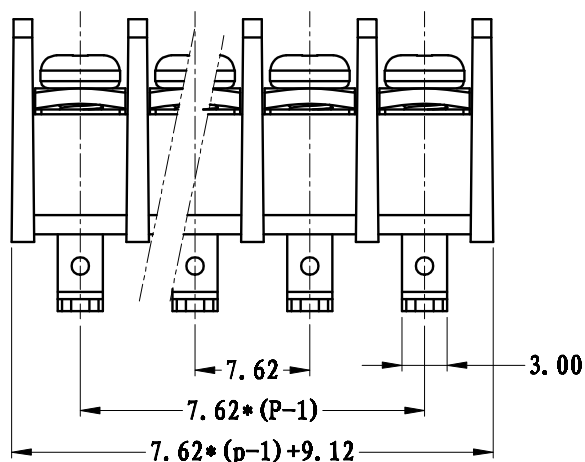

	pitch dimension			Nominal dimension					
	over	over	over	over	over	over	over	over	—
	0	6	10	0	30	60	100	150	□
variable	to	to	to	to	to	to	to		
range	6	10	24	30	60	100	150		○
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	M3*6-6*6	SQFFA306023V	P	碳钢	镀锌
2	LW1R-7.62-焊脚	5010B0004AV	P	黄铜	镀锡
1	LW1-7.62-主体	5010A0YXXAV	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE	11-05-10	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1: 1
				DWG NO.	SP-2-5010004
				TITLE	LW1R-7.62-XP-1Y-00A
					LW1R-7.62-成品

上海联捷电气有限公司
Shanghai Hlinker Electric C.O.,LTD

THIRD ANGLE PROJECTION
1 of 1