

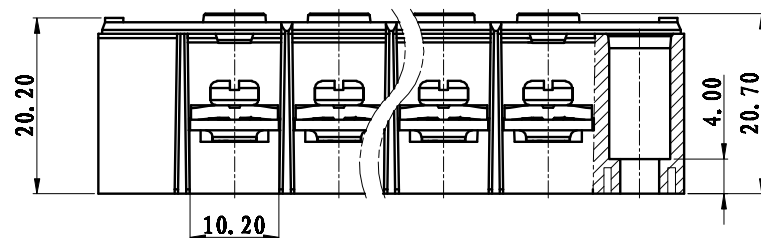


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

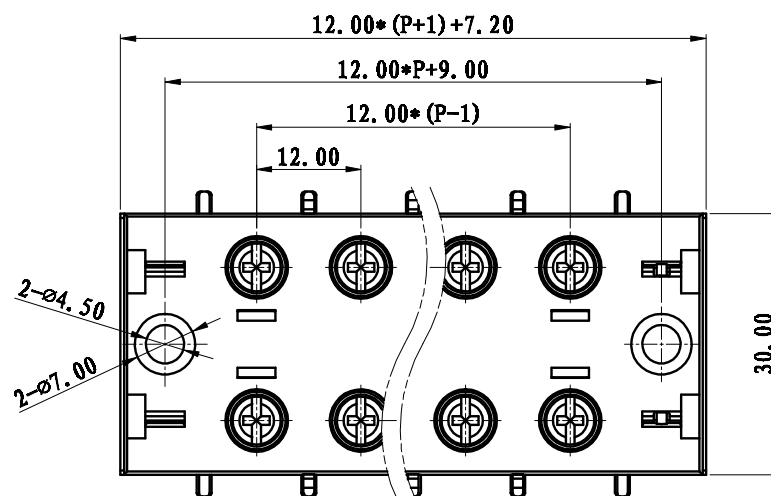

NOTES:
Pitch : 12.0mm
Rated Voltage : 600V
Rated Current : 25A
Withstand Voltage :
AC3000V for 1 minute
Insulation Resistance :
1000MΩ / DC1000V
Using Temperature Range :
-40℃ ~ +105℃
Suitable Electric Wire: 22-14 AWG
Screw Torque Value : M4/1.2Nm

技术要求:
间距: 12.0mm
额定电压: 600V
额定电流: 25A
耐电压值: AC3000V/min
绝缘阻抗: 1000MΩ/DC1000V
使用条件: -40℃~+105℃
适用线规: 22-14 AWG
螺丝扭矩: M4/1.2Nm



	pitch dimension			Nominal dimension					— /
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		∠ C
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	TB1-25A-白条		1	A4膜纸	
4	M4*9-10*10	SPFFA409073V	2P	碳钢	镀锌
3	TB1-25A-导电件	6TB1BDD025AV	P	黄铜	镀镍
2	TB1-25XX-A盖板	6TB1C702XX0V	1	PC	透明
1	TB1-25XX-A本体	6TB1B072XX0V	1	PC	
NO.	NAME OF PART	NO. OF PART	QTY	MATERIAL	NOTES
DES.	LDD	DATE	2015/05/07	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	TB1-25XX-A-1Y-00A
					TB1-25XX-A成品