
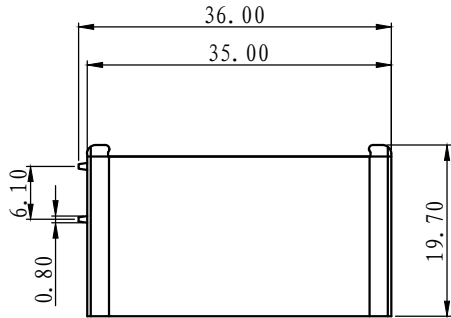
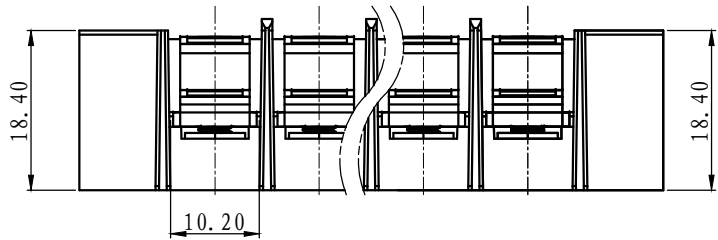


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

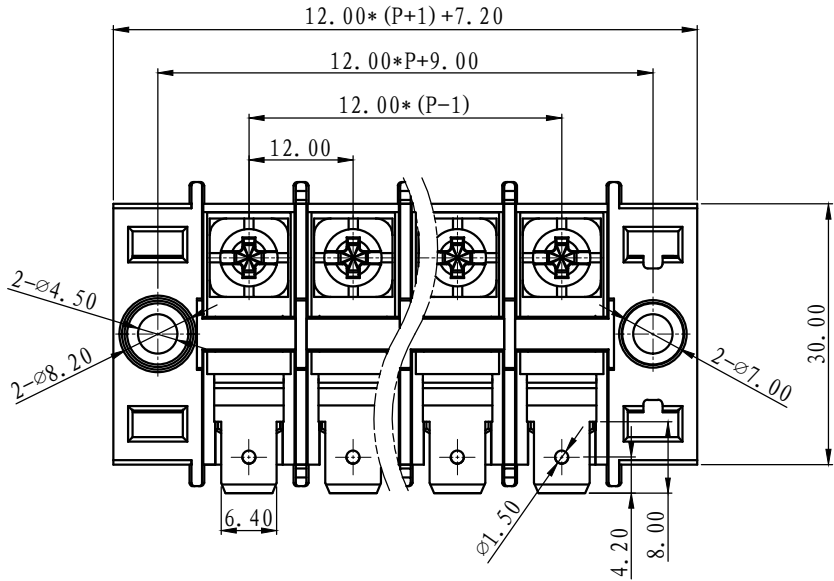

NOTES:
Pitch : 12.0mm
Rated Voltage : 600V
Rated Current : 25A
Withstand Voltage :
AC3000V for 1 minute
Using Temperature Range :
- 40℃ ~ + 105℃
Suitable Electric Wire: 22-14 AWG
Screw Torque Value : M4/1.2Nm
Adaptable End:FDD1-187(5)

技术要求:
间距: 12.0mm
额定电压: 600V
额定电流: 25A
耐电压值: AC3000V/min
使用条件: -40℃~+105℃
适用线规: 22-14 AWG
螺丝扭矩: M4/1.2Nm
可适配端头: FDD1-187(5)

	pitch dimension			Nominal dimension					— /
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150	150	— /
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	TB1-25A-白条		1	A4腹膜纸	
4	M4*9-10*10	SPFFA409073V	P	碳钢	镀锌
3	M4外六角螺母	SM00A000004V	P	铁	镀锌
2	JX0-66-导电件	6JX0BDD066AV	P	黄铜	镀镍
1	TB1-25XX-本体(一进二出、一进三出)	6TB1E0Y2XX0V-2	1	PC	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	CMZ	DATE 2025/11/27	UNITS mm	THIRD ANGLE PROJECTION	
CHK.		DATE	SIZE A4	SHEET 1 of 1	
APP.		DATE	SCALE 1:1	DWG NO.	SP-2-6TB1020 REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	TB1-25XX-B-1Y-00A
					TB1-25XX-B成品