

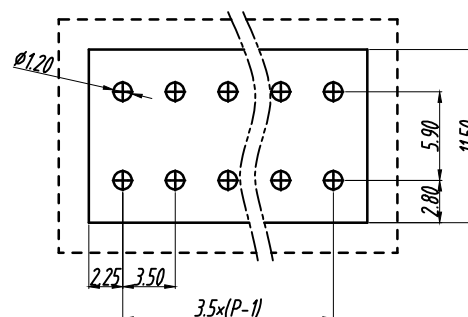


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		


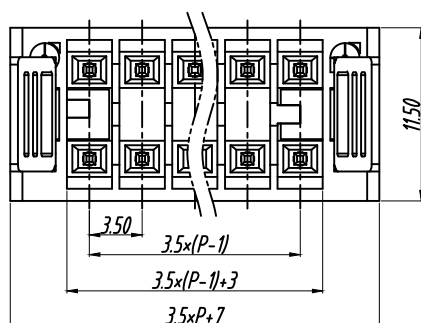


技术要求:

1. 额定电压: 300V, 额定电流: 9.5A
2. 间距: 3.5mm
3. 耐电压值: AC 2500V/min
4. 使用条件: -40℃~+105℃
5. 适用线规: 28-16AWG



NOTES:

1. Voltage Rating: 300V, Current Rating: 9.5A
2. PITCH: 3.5mm
3. Insulation Withstands Voltage: AC2500V/min
4. Using Temperature Range: -40℃~+105℃
5. Suitable Electric Wire: 28-16AWG


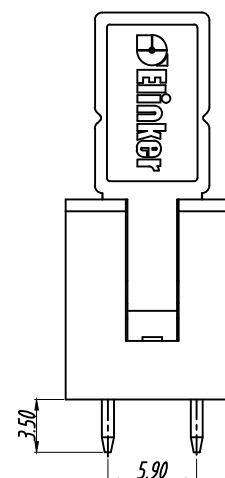
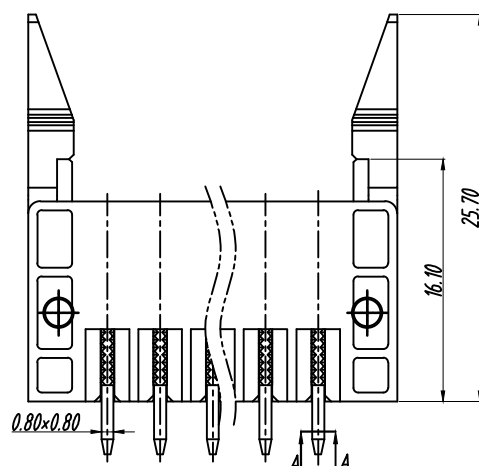


	pitch dimension			Nominal dimension					
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	AZ08T-3.5长直针	1189B0001AV	2P	黄铜	镀锡
2	LZ4-3.5手柄	118800Y01AV	2	POM	
1	LZ4J-3.5主体	1189A0YXXAV	1	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	CMZ	DATE	26/01/12	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	LZ4VZ-3.5-XXP-1Y-00A
					LZ4VZ-3.5-成品

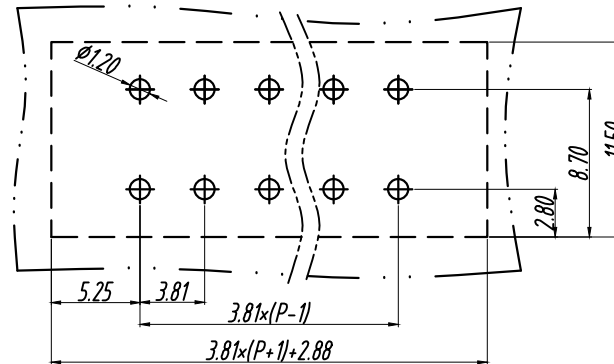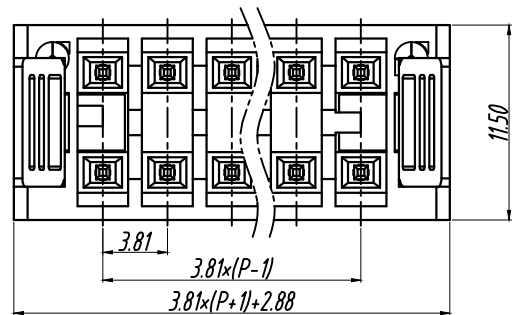

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

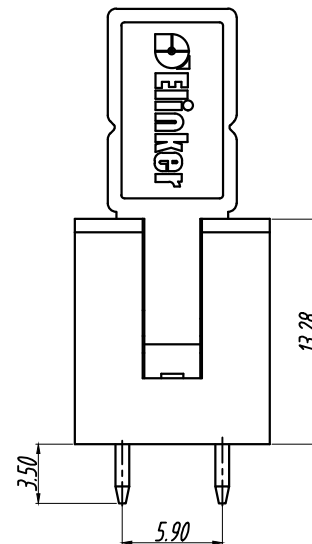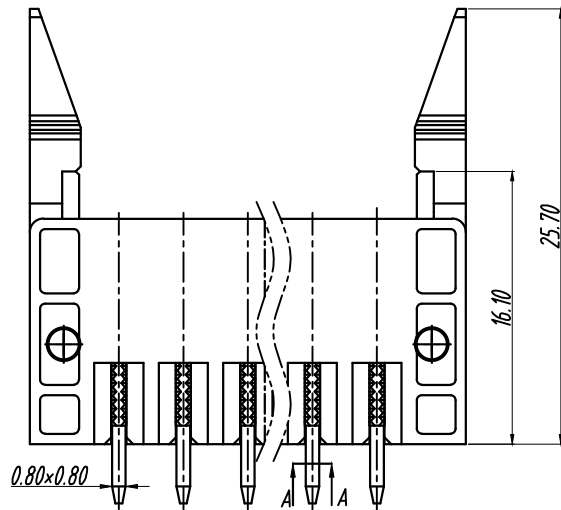

技术要求:

1. 额定电压: 300V, 额定电流: 9.5A
2. 间距: 3.81mm
3. 耐压值: AC 2500V/min
4. 使用条件: -40℃~+105℃
5. 适用线规: 28-16AWG

NOTES:

1. Voltage Rating: 300V, Current Rating: 9.5A
2. PITCH: 3.81mm
3. Insulation Withstands Voltage: AC2500V/min
4. Using Temperature Range: -40℃~+105℃
5. Suitable Electric Wire: 28-16AWG

	pitch dimension			Nominal dimension					—
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		□
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	LZ4-3.5直针	1189B0001AV	2P	黄铜	
2	LC8M-3.5手柄	118800Y01AV	2	POM	
1	LZ4J-3.81主体	1192A0YXXAV	1	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	CMZ	DATE 26/01/14	UNITS mm	THIRD ANGLE PROJECTION	SHEET 1 of 1
CHK.		DATE	SIZE A4		
APP.		DATE	SCALE 1:1	DWG NO.	SP-2-1169001 REV: V0
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	LZ4VZ-3.81-XXP-1Y-00A LZ4VZ-3.81-成品