

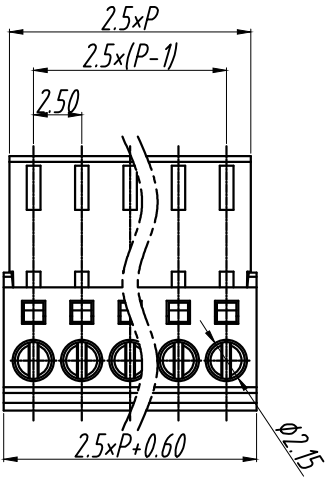


REVISION		RECORD	
REV.	CONTENT	MOD.	DATE
△	初版发行		



NOTES:

- 1. Voltage Rating: 150V, Current Rating: 6A
- 2. PITCH: 2.50mm
- 3. Insulation Withstands Voltage: AC2500V/min
- 4. Using Temperature Range: -40℃~+105℃
- 5. Suitable Electric Wire: 26~18AWG
- 6. Screw Torque Value: 0.1 N.m
- 7. Stripping length: 6mm

技术要求:

- 1. 额定电压: 150V, 额定电流: 6A
- 2. 间距: 2.50mm
- 3. 耐电压值: AC 2500V/min
- 4. 使用条件: -40℃~+105℃
- 5. 适用线规: 26~18AWG
- 6. 螺丝扭力: 0.1 N.m
- 7. 剥线长度: 6mm

	pitch dimension			Naminl dimension					— □ ⌒
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5.	LC1-2.5-夹子	1263B0001AV	P	紫铜	镀亮锡
4.	LG254-2.54-铜方块	F1A0BLC2543V	P	黄铜	镀镍
3.	LG254-2.54-螺丝	SPOYA163001V	P	碳钢	三价铬钝化彩锌
2.	LC6-2.5-盖子	1023C0YXXAV	1	PA66-V0	
1.	LC1-2.5-主体	1261A0YXXAV	1	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	CMZ	DATE	26/01/09	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	LC1-2.5-XXP-1Y-00A LC1-2.5-成品