
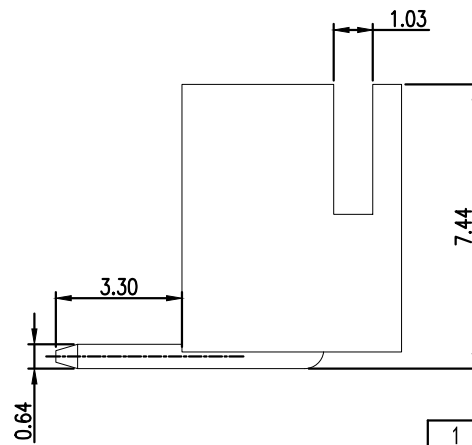
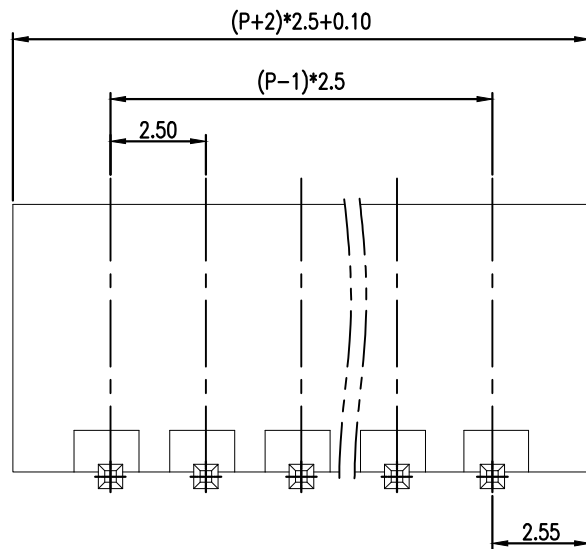
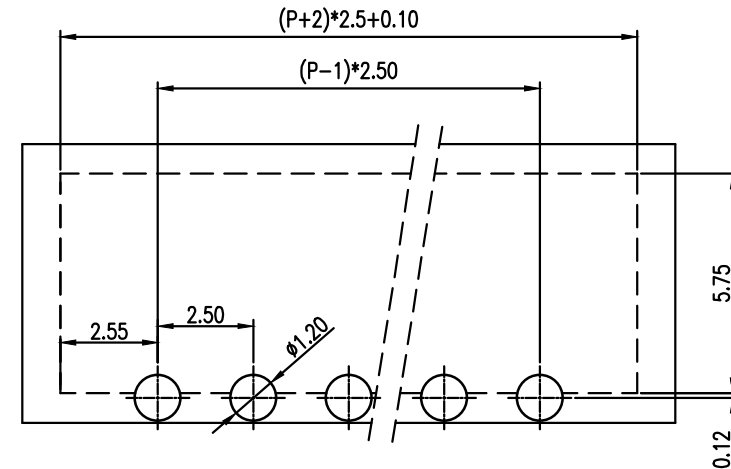


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

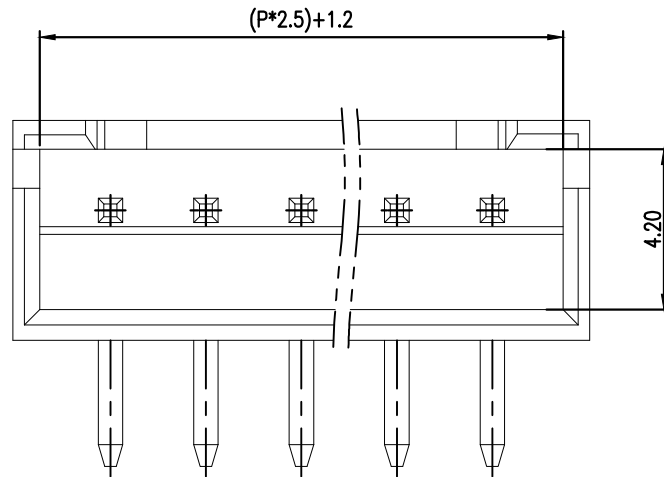

NOTES:

1. Voltage Rating: 160V, Current Rating: 6A
2. PITCH: 2.5mm
3. Insulation Withstands Voltage: AC 2000V/min
4. Using Temperature Range:: -40℃~+105℃

技术要求:

1. 额定电压：160V，额定电流：6A
2. 间距：2.5mm
3. 耐电压值：AC 2000V/min
4. 使用条件：-40℃~+105℃

	pitch dimension			Nominal dimension					—
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150	150	□
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

1	LZ8XHR-2.5-XXP-1Y-00A	LZ8XHR-2.5-XXP-1Y-00A	1	PA66		
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES	
DES.	CMZ	DATE 2026/06/11	UNITS mm	THIRD ANGLE PROJECTION	SHEET 1 of 1	
CHK.		DATE	SIZE A4	DWG NO.	SP-1-1169C01 REV: V0	
APP.		DATE	SCALE 1:1			
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	LZ8XHR-2.5-XXP-1Y-00A	
					LZ8XHR-2.5-XXP-1Y-00A	