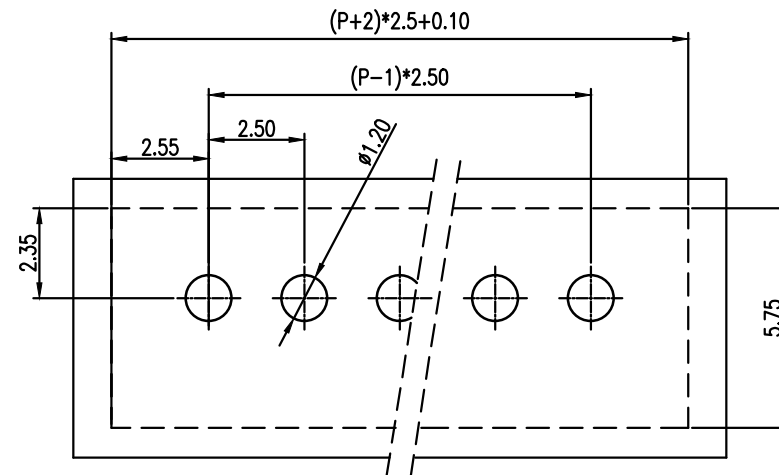
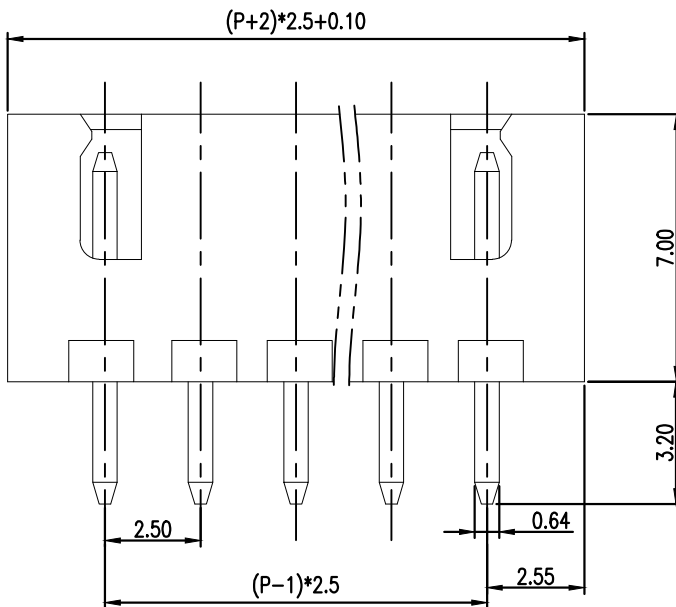
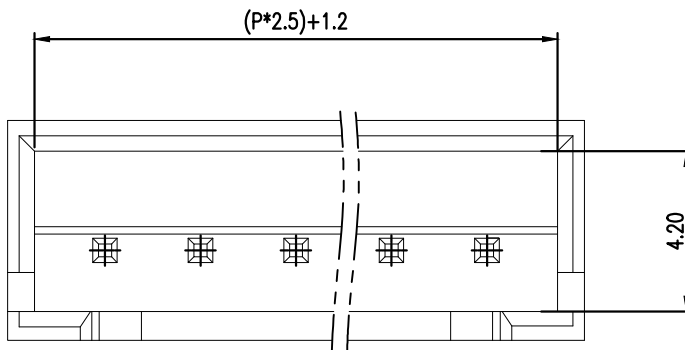


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

NOTES:

1. Voltage Rating: 160V, Current Rating: 6A
2. PITCH: 2.5mm
3. Insulation Withstands Voltage: AC 2000V/min
4. Using Temperature Range:: -40℃~+105℃

技术要求:

1. 额定电压: 160V, 额定电流: 6A
2. 间距: 2.5mm
3. 耐电压值: AC 2000V/min
4. 使用条件: -40℃~+105℃

	pitch dimension			Nominal dimension					—
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

1	LZ8XHV-2.5-XXP-1Y-00A	LZ8XHV-2.5-XXP-1Y-00A	1	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	CMZ	DATE 2026/06/11	UNITS mm	THIRD ANGLE PROJECTION	SHEET 1 of 1
CHK.		DATE	SIZE A4		
APP.		DATE	SCALE 1:1	DWG NO.	SP-1-1169C01 REV: V0
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	LZ8XHV-2.5-XXP-1Y-00A
					LZ8XHV-2.5-XXP-1Y-00A