

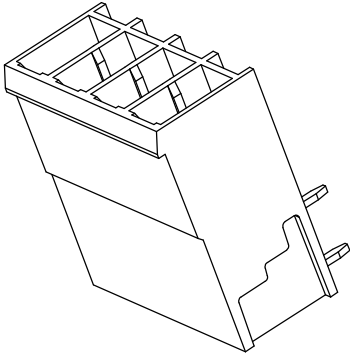



REVISION RECORD			
REV.	CONTENT	MOD.	DATE
	初版发行		

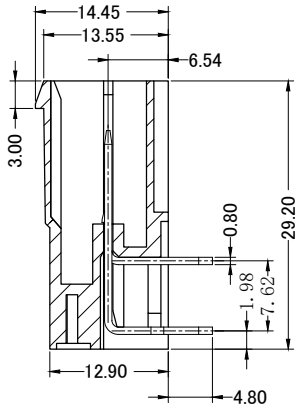


- NOTES:
1. Voltage Rating: 380V, Current Rating: 32A
 2. PITCH: 7.62mm
 3. Insulation Withstands Voltage: AC2500V/min
 4. Using Temperature Range: -40° C ~ +105° C
 5. Pole: 2-12P

- 技术要求:
1. 额定电压: 380V, 额定电流: 32A
 2. 间距: 7.62mm
 3. 耐电压值: AC2500V/min
 4. 使用条件: -40° - +105°
 5. 极数: 2-12线



SECTION A-A

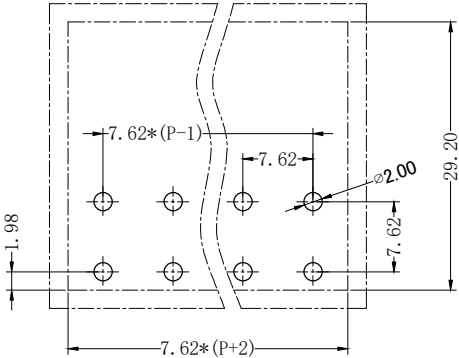

	pitch dimension			Nominal dimension					
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

2	LZ1RH-7.62-弯针	1154B0002BV	P	黄铜	镀雾锡
1	LZ1H-7.62-针套	1154H0YXXAV	1	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	CMZ	DATE 2026/07/13	UNITS	MM	THIRD ANGLE PROJECTION SHEET
CHK.		DATE	SIZE	A4	1 of 1
APP.		DATE	SCALE	1:1	DWG NO. SP-2-1048002
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	LZ1RH-7.62-XXP-1Y-00A LZ1RH-7.62-成品