
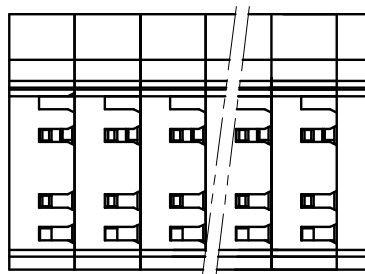
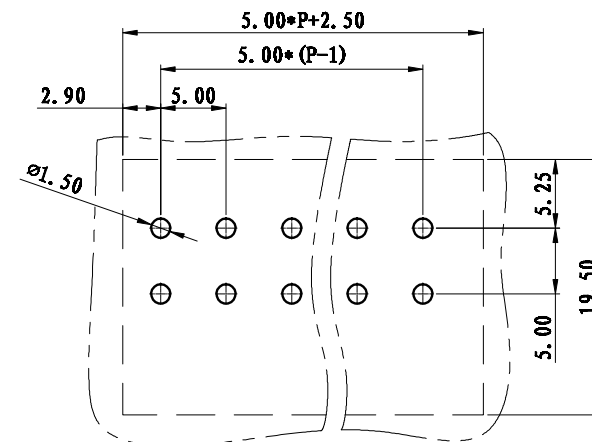
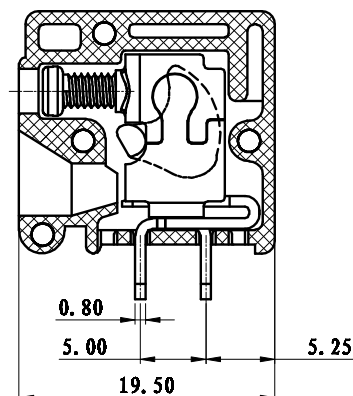


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

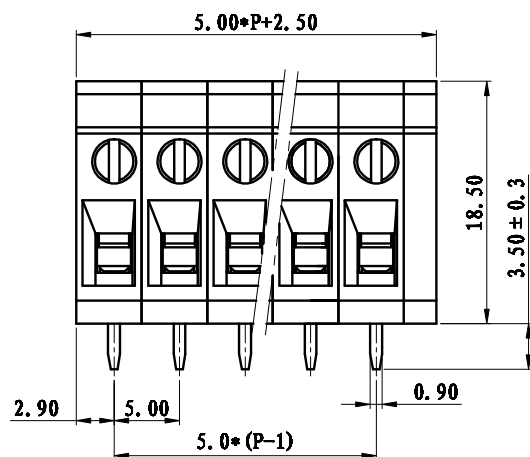





技术要求:
 间距: 5.0mm
 额定电压: 300V
 额定电流: 24A
 耐电压值: AC2500V/min
 绝缘阻抗: 500MΩ/DC500V
 使用条件: -40℃~+105℃
 适用线规: 30~12AWG
 螺丝扭矩: 0.4 N.m

NOTES:
 Pitch: 5.0mm
 Rated Voltage: 300V
 Rated Current: 24A
 Withstand Voltage:
 AC2500V for 1 minute
 Insulation Resistance:
 500MΩ / DC500V
 Using Temperature Range:
 -40℃ ~ +105℃
 Wire range: 30~12AWG
 Screw Torque Value: 0.4 N.m

	pitch dimension			Nominal dimension					
	over	over	over	over	over	over	over	over	—
variable range	0	6	10	0	30	60	100	150	▱
	to	to	to	to	to	to	to		
	6	10	24	30	60	100	150		⌒
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	LG10SR-2.5-盖板	2010C0Y01AV	1	PA66	
5	LC3-5.08-螺丝	SP0YA256501V	P	碳钢	三价铬钝化彩锌
4	LG10SRA-焊脚	2010B0001AV	P	紫铜	镀锡
3	LC3-5.08-压块	1009B0001AV	P	碳钢	三价铬钝化彩锌
2	LC3-5.08-铁方盒	F1A0ALC1031V	P	碳钢	三价铬钝化彩锌
1	LG10SR-5.0-主体	2010A0Y01AV	P	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE	11-03-25	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				DWG NO.	SP-2-2010001
				REV:	V0
				TITLE	LG10SRA-5.0-XXP-1Y-00A
					LG10SRA-5.0-成品

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行		

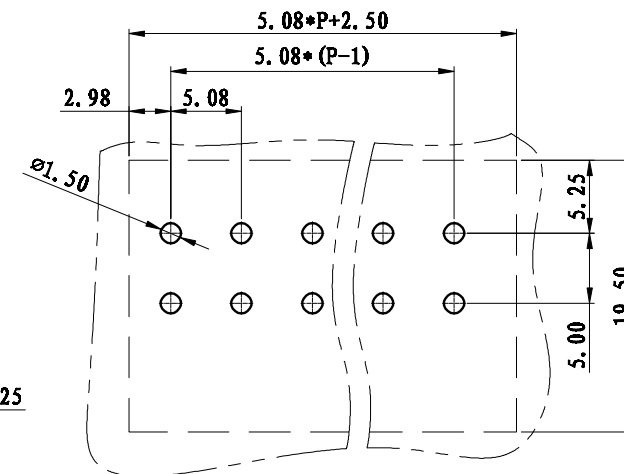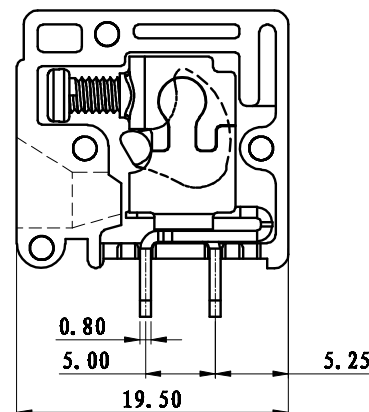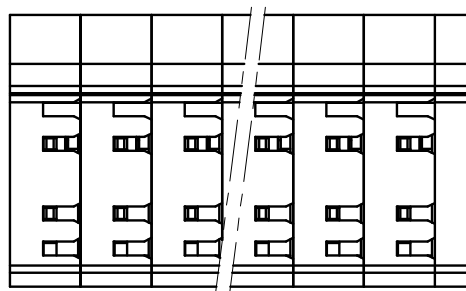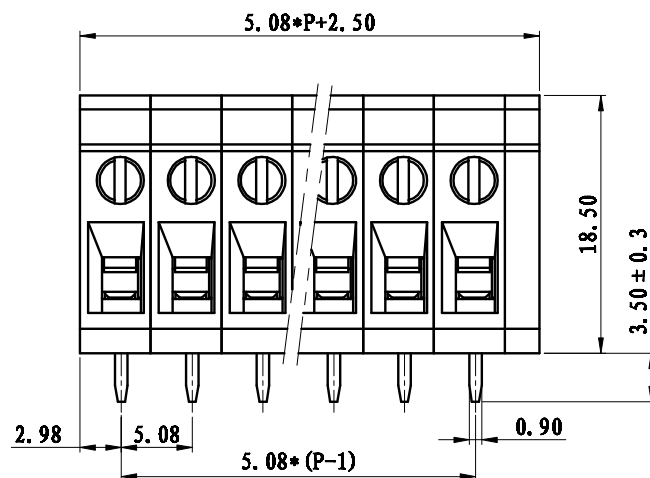





技术要求:
 间距: 5.08mm
 额定电压: 300V
 额定电流: 24A
 耐电压值: AC2500V/min
 绝缘阻抗: 500MΩ/DC500V
 使用条件: -40℃~+105℃
 适用线规: 30~12AWG
 螺丝扭矩: 0.4 N.m

NOTES:
 Pitch: 5.08mm
 Rated Voltage: 300V
 Rated Current: 24A
 Withstand Voltage:
 AC2500V for 1 minute
 Insulation Resistance:
 500MΩ / DC500V
 Using Temperature Range:
 -40℃ ~ +105℃
 Wire range: 30~12AWG
 Screw Torque Value: 0.4 N.m

	pitch dimension			Nominal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	— /
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		— /
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	LG105R-2.5-盖板		2010C0Y01AV		1	PA66	
5	LC3-5.08-螺丝		SP0YA256501V		P	碳钢	三价铬钝化彩锌
4	LG105RA-焊脚		2010B0001AV		P	紫铜	镀锡
3	LC3-5.08-压块		1009B0001AV		P	碳钢	三价铬钝化彩锌
2	LC3-5.08-铁方盒		F1A0ALC1031V		P	碳钢	三价铬钝化彩锌
1	LG105R-5.08-主体		2034A4Y01AV		P	PA66	
NO.	NAME OF PART		NO. OF PART		Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE	11-03-25	UNITS	MM	THIRD ANGLE PROJECTION	SHEET
CHK.		DATE		SIZE	A4		1 of 1
APP.		DATE		SCALE	1:1	DWG NO.	SP-2-2034001 REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric CO., LTD						TITLE	LG105RA-5.08-XP-1Y-00
							LG105RA-5.08-成品

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行		

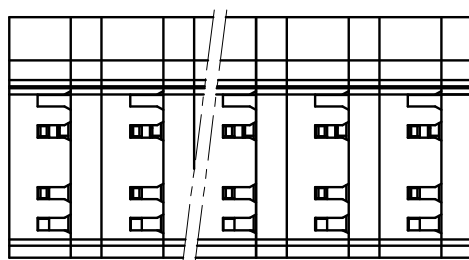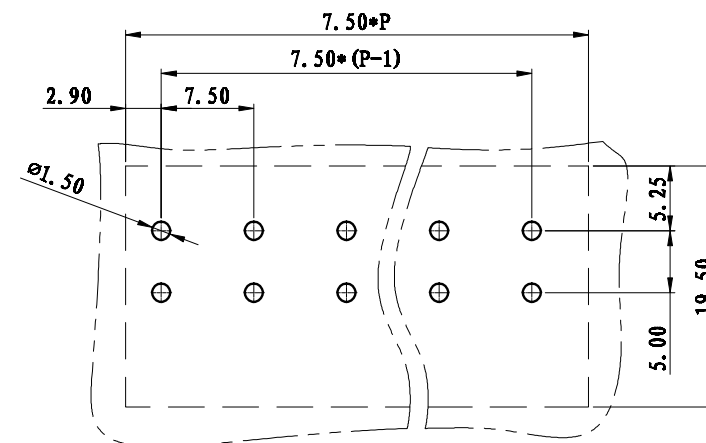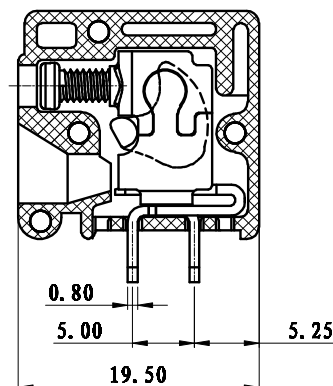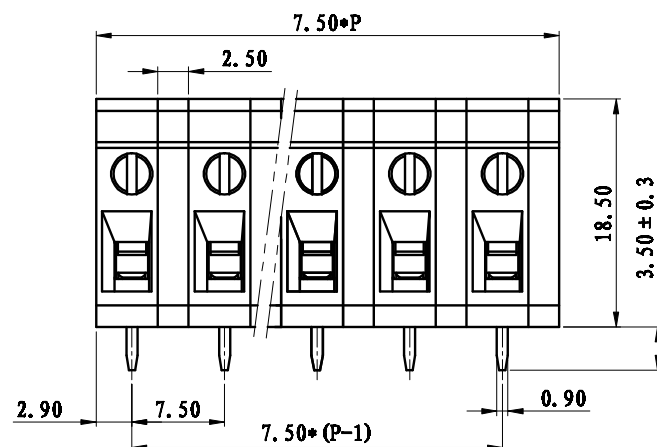





技术要求:
 间距: 7.5mm
 额定电压: 300V
 额定电流: 24A
 耐电压值: AC2500V/min
 绝缘阻抗: 500MΩ/DC500V
 使用条件: -40℃ ~ +105℃
 适用线规: 30~12AWG
 螺丝扭矩: 0.4 N.m

NOTES:
 Pitch: 7.5mm
 Rated Voltage: 300V
 Rated Current: 24A
 Withstand Voltage:
 AC2500V for 1 minute
 Insulation Resistance:
 500MΩ / DC500V
 Using Temperature Range:
 -40℃ ~ +105℃
 Wire range :30~ 12AWG
 Screw Torque Value : 0.4 N.m

	pitch dimension			Nominal dimension					— /
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
variable range	0	6	10	0	30	60	100	150	— /
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

7	LG10SR-2.5-盖板	2010C0Y01AV	1	PA66	
6	LG10SR-2.5-隔板	2010H0Y01AV	P-1	PA66	
5	LC3-5.08-螺丝	SP0YA256501V	P	碳钢	三价铬钝化彩锌
4	LG10SRA-焊脚	2010B0001AV	P	紫铜	镀锡
3	LC3-5.08-压块	1009B0001AV	P	碳钢	三价铬钝化彩锌
2	LC3-5.08-铁方盒	F1A0ALC1031V	P	碳钢	三价铬钝化彩锌
1	LG10SR-5.0-主体	2010A0Y01AV	P	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE	11-03-25	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				DWG NO.	SP-2-2010003
				REV.	V0
				TITLE	LG10SRA-7.5-XP-1Y-00A
					LG10SRA-7.5-成品

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行		

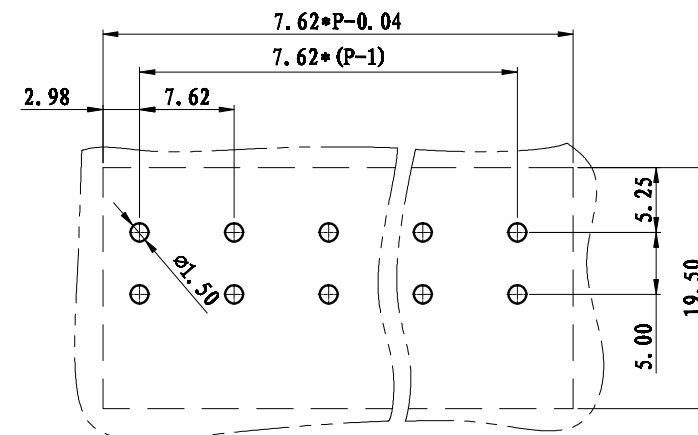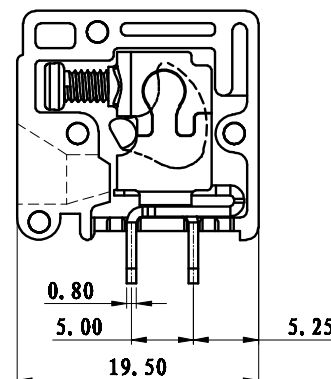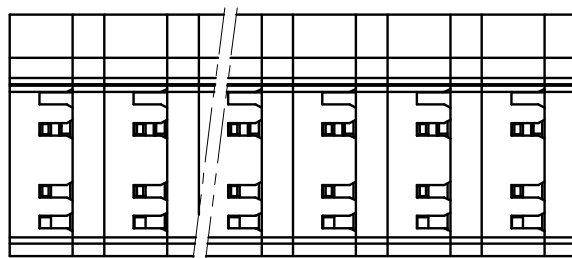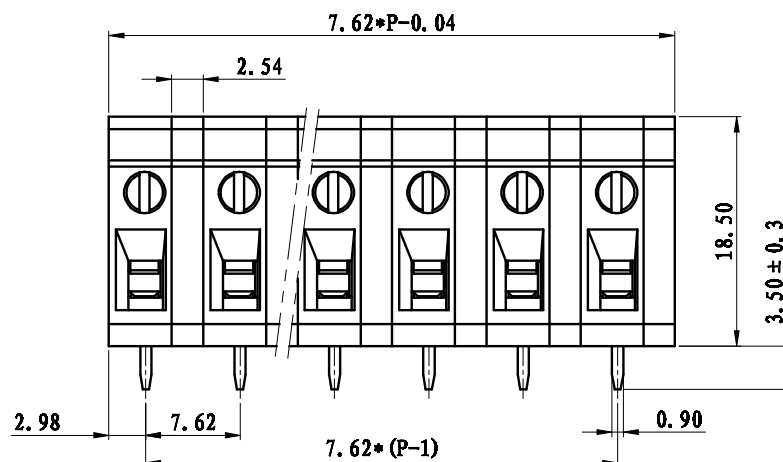

技术要求:
 间距: 7.62mm
 额定电压: 300V
 额定电流: 24A
 耐电压值: AC2500V/min
 绝缘阻抗: 500MΩ/DC500V
 使用条件: -40℃ ~ +105℃
 适用线规: 30~12AWG
 螺丝扭矩: 0.4 N.m




NOTES:
 Pitch: 7.62mm
 Rated Voltage: 300V
 Rated Current: 24A
 Withstand Voltage:
 AC2500V for 1 minute
 Insulation Resistance:
 500MΩ / DC500V
 Using Temperature Range:
 -40℃ ~ +105℃
 Wire range :30~ 12AWG
 Screw Torque Value : 0.4 N.m

	pitch dimension			Nominal dimension					— /
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150		
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

7	LG105R-2.5-盖板	2010C0Y01AV	1	PA66	
6	LG105R-2.54-隔板	2010H4Y01AV	P-1	PA66	
5	LC3-5.08-螺丝	SP0YA256501V	P	碳钢	三价铬钝化彩锌
4	LG105RA-焊脚	2010B0001AV	P	紫铜	镀锡
3	LC3-5.08-压块	1009B0001AV	P	碳钢	三价铬钝化彩锌
2	LC3-5.08-铁方盒	F1A0ALC1031V	P	碳钢	三价铬钝化彩锌
1	LG105R-5.08-主体	2034A4Y01AV	P	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE	11-03-25	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				DWG NO.	SP-2-2034003
				REV:	V0
				TITLE	LG105RA-7.62-XP-1Y-00A
					LG105RA-7.62-成品


上海联捷电气有限公司
 Shanghai Elinker Electric CO., LTD

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行		

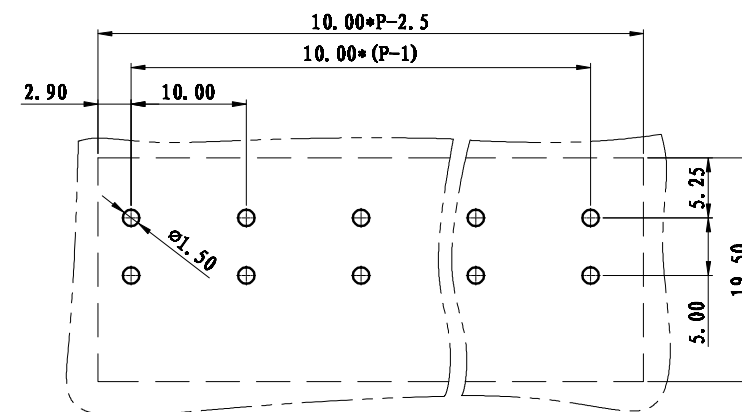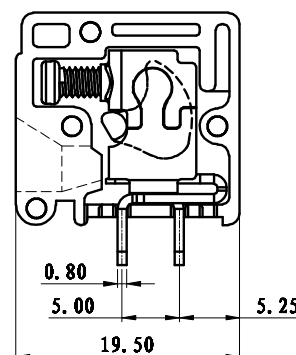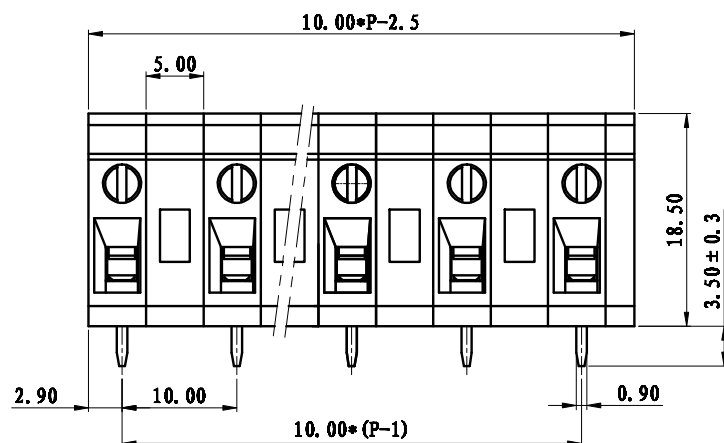

技术要求:
 间距: 10.0mm
 额定电压: 300V
 额定电流: 24A
 耐电压值: AC2500V/min
 绝缘阻抗: 500MΩ/DC500V
 使用条件: -40℃~+105℃
 适用线规: 30~12AWG
 螺丝扭矩: 0.4 N.m

NOTES:
 Pitch: 10.0mm
 Rated Voltage: 300V
 Rated Current: 24A
 Withstand Voltage:
 AC2500V for 1 minute
 Insulation Resistance:
 500MΩ / DC500V
 Using Temperature Range:
 -40℃ ~ +105℃
 Wire range: 30~12AWG
 Screw Torque Value: 0.4 N.m




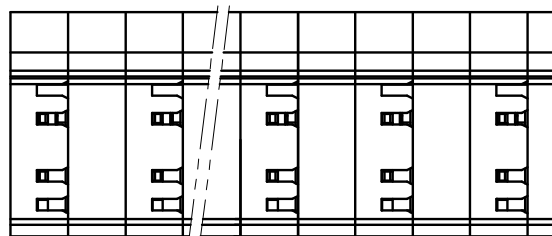


	pitch dimension			Nominal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

7	LG105R-2.5-盖板	2010C0Y01AV	1	PA66	
6	LG105R-5.0-隔板	2046H0Y01AV	P-1	PA66	
5	LC3-5.08-螺丝	SP0YA256501V	P	碳钢	三价铬钝化彩锌
4	LG105RA-焊脚	2010B0001AV	P	紫铜	镀锡
3	LC3-5.08-压块	1009B0001AV	P	碳钢	三价铬钝化彩锌
2	LC3-5.08-铁方盒	F1A0ALC1031V	P	碳钢	三价铬钝化彩锌
1	LG105R-5.0-主体	2010A0Y01AV	P	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE	11-03-25	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				DWG NO.	SP-2-2010005
				REV.	V0
				TITLE	LG105RA-10.0-XXP-1Y-00A
					LG105RA-10.0-成品

上海联捷电气有限公司
 Shanghai Elinker Electric CO., LTD

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行		

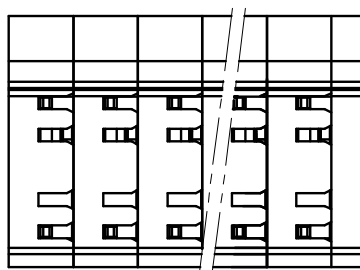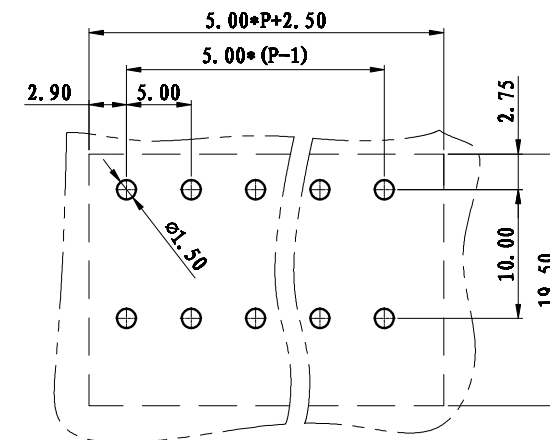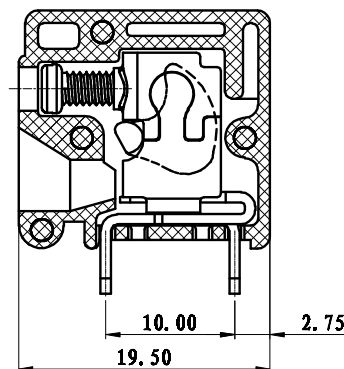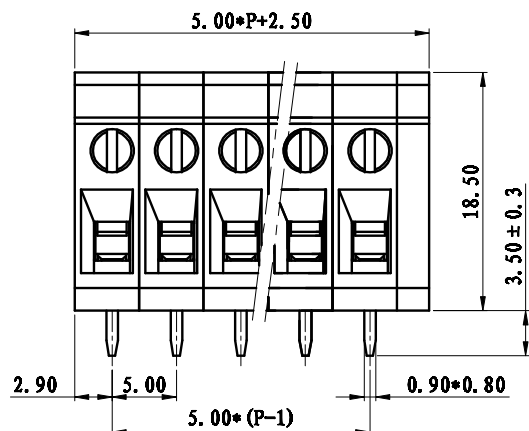

技术要求:
 间距: 5.0mm
 额定电压: 300V
 额定电流: 24A
 耐电压值: AC2500V/min
 绝缘阻抗: 500MΩ/DC500V
 使用条件: -40℃~+105℃
 适用线规: 30~12AWG
 螺丝扭矩: 0.4 N.m





NOTES:
 Pitch: 5.0mm
 Rated Voltage: 300V
 Rated Current: 24A
 Withstand Voltage:
 AC2500V for 1 minute
 Insulation Resistance:
 500MΩ / DC500V
 Using Temperature Range:
 -40℃ ~ +105℃
 Wire range: 30~12AWG
 Screw Torque Value: 0.4 N.m

	pitch dimension			Nominal dimension					
	over	over	over	over	over	over	over	over	—
variable	0	6	10	0	30	60	100	150	□
range	to	to	to	to	to	to	to		○
	6	10	24	30	60	100	150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	LG10SR-2.5-盖板	2010C0Y01AV	1	PA66	
5	LC3-5.08-螺丝	SP0YA256501V	P	碳钢	三价铬钝化彩锌
4	LG10SRB-焊脚	2010B0002AV	P	紫铜	镀锡
3	LC3-5.08-压块	1009B0001AV	P	碳钢	三价铬钝化彩锌
2	LC3-5.08-铁方盒	F1A0ALC1031V	P	碳钢	三价铬钝化彩锌
1	LG10SR-5.0-主体	2010A0Y01AV	P	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE	11-03-25	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				DWG NO.	SP-2-2010002
				REV:	V0
				TITLE	LG10SRB-5.0-XXP-1Y-00A
					LG10SRB-5.0-成品

上海联捷电气有限公司
 Shanghai Elinker Electric CO., LTD

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行		

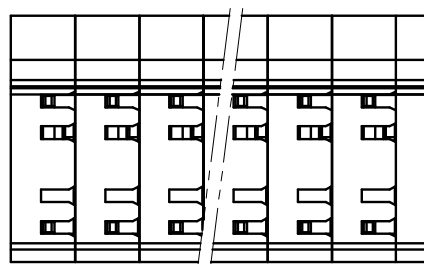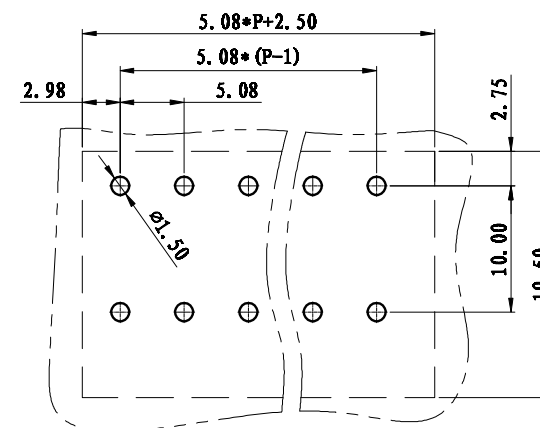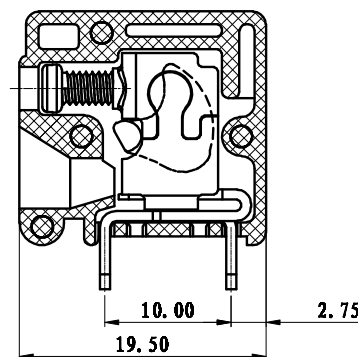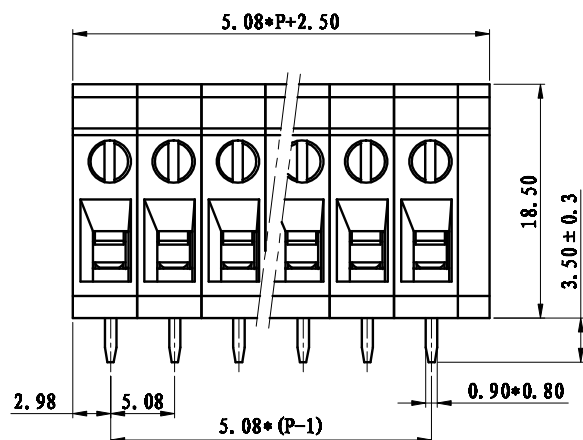

技术要求:
 间距: 5.08mm
 额定电压: 300V
 额定电流: 24A
 耐电压值: AC2500V/min
 绝缘阻抗: 500MΩ/DC500V
 使用条件: -40℃ ~ +105℃
 适用线规: 30~12AWG
 螺丝扭矩: 0.4 N.m





NOTES:
 Pitch: 5.08mm
 Rated Voltage: 300V
 Rated Current: 24A
 Withstand Voltage:
 AC2500V for 1 minute
 Insulation Resistance:
 500MΩ / DC500V
 Using Temperature Range:
 -40℃ ~ +105℃
 Wire range: 30~12AWG
 Screw Torque Value: 0.4 N.m

	pitch dimension			Nominal dimension					— ◇ ○
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	LG105R-2.5-盖板	2010C0Y01AV	1	PA66	
5	LC3-5.08-螺丝	SP0YA256501V	P	碳钢	三价铬钝化彩锌
4	LG105RB-焊脚	2010B0002AV	P	紫铜	镀锡
3	LC3-5.08-压块	1009B0001AV	P	碳钢	三价铬钝化彩锌
2	LC3-5.08-铁方盒	F1A0ALC1031V	P	碳钢	三价铬钝化彩锌
1	LG105R-5.08-主体	2034A0Y01AV	P	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE	11-03-25	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				DWG NO.	SP-2-2034002
				REV:	V0
				TITLE	LG105RB-5.08-XXP-1Y-00A
					LG105RB-5.08-成品

上海联捷电气有限公司
 Shanghai Elinker Electric CO., LTD

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行		

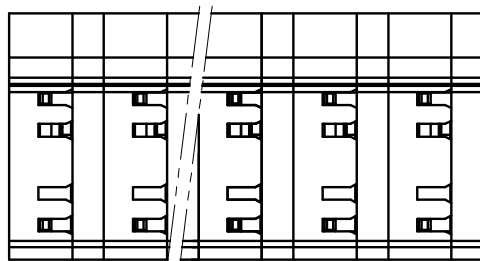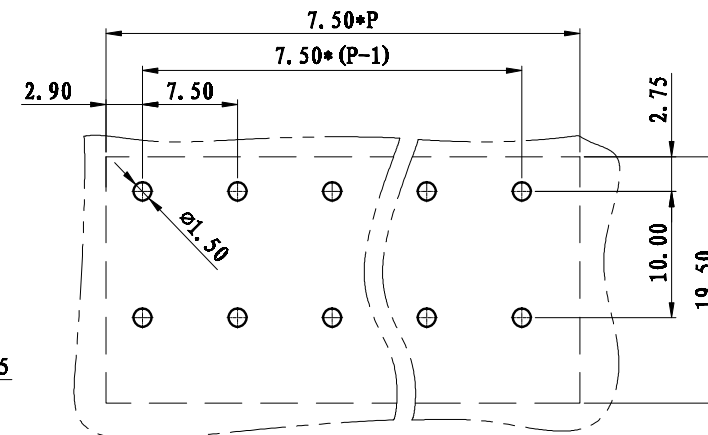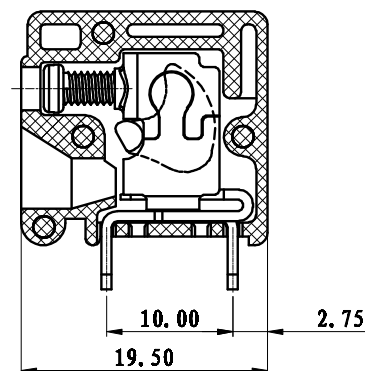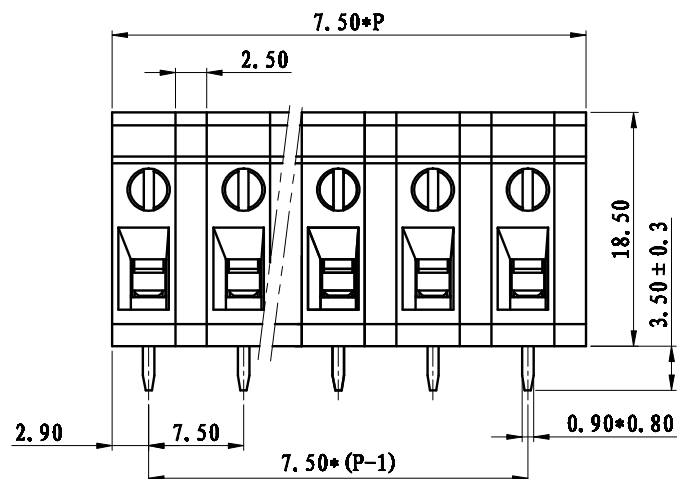

技术要求:

间距: 7.5mm

额定电压: 300V

额定电流: 24A

耐电压值: AC2500V/min

绝缘阻抗: 500MΩ/DC500V

使用条件: -40℃ ~ +105℃

适用线规: 30~12AWG

螺丝扭矩: 0.4 N.m

NOTES:

Pitch: 7.5mm

Rated Voltage: 300V

Rated Current: 24A

Withstand Voltage:

AC2500V for 1 minute

Insulation Resistance:

500MΩ / DC500V

Using Temperature Range:

-40℃ ~ +105℃





Wire range: 30~12AWG

Screw Torque Value: 0.4 N.m

	pitch dimension			Nominal dimension					— ◇ ○
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

7	LG10SR-2.5-盖板	2010C0Y01AV	1	PA66	
6	LG10SR-2.5-隔板	2010H4001AV	P-1	PA66	
5	LC3-5.08-螺丝	SP0YA256501V	P	碳钢	三价铬钝化彩锌
4	LG10SRB-焊脚	2010B0002AV	P	紫铜	镀锡
3	LC3-5.08-压块	1009B0001AV	P	碳钢	三价铬钝化彩锌
2	LC3-5.08-铁方盒	F1A0ALC1031V	P	碳钢	三价铬钝化彩锌
1	LG10SR-5.0-主体	2010A0Y01AV	P	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE	11-03-25	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				DWG NO.	SP-2-2010004
				REV:	V0
				TITLE	LG10SRB-7.5-XXP-1Y-00A
					LG10SRB-7.5-成品

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行		

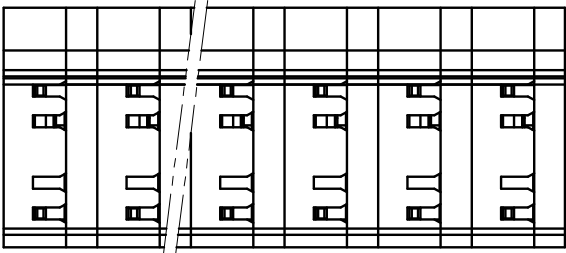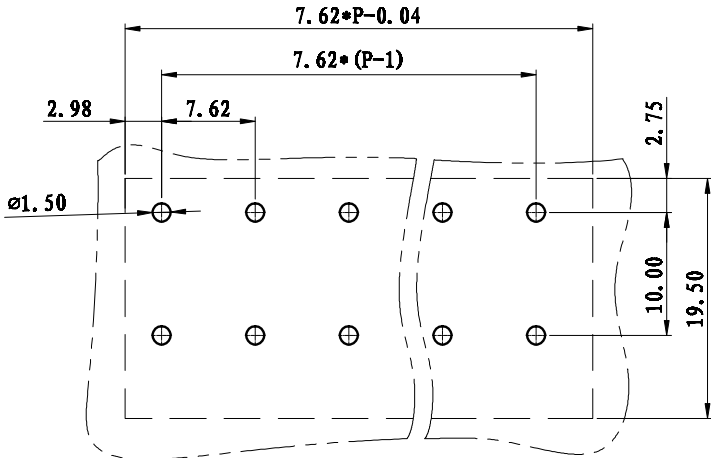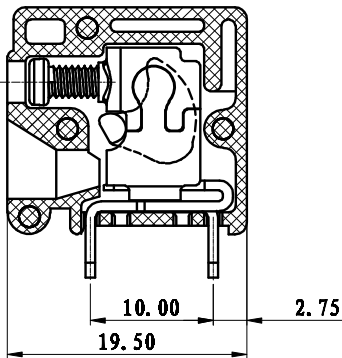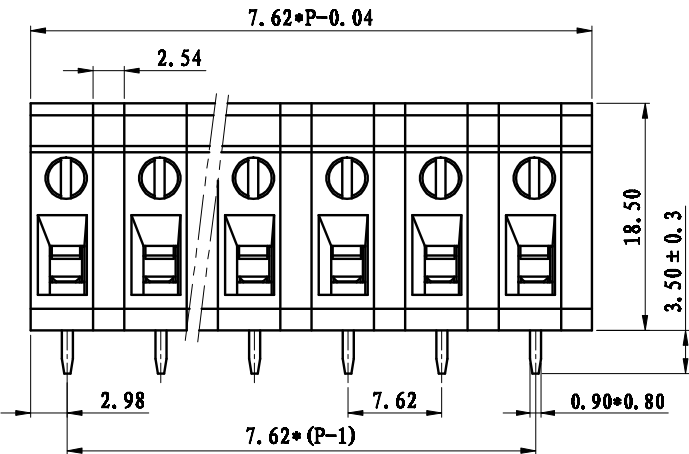





技术要求:
 间距: 7.62mm
 额定电压: 300V
 额定电流: 24A
 耐电压值: AC2500V/min
 绝缘阻抗: 500MΩ/DC500V
 使用条件: -40℃~+105℃
 适用线规: 30~12AWG
 螺丝扭矩: 0.4 N.m

NOTES:
 Pitch: 7.62mm
 Rated Voltage: 300V
 Rated Current: 24A
 Withstand Voltage:
 AC2500V for 1 minute
 Insulation Resistance:
 500MΩ / DC500V
 Using Temperature Range:
 -40℃ ~ +105℃
 Wire range: 30~ 12AWG
 Screw Torque Value: 0.4 N.m

	pitch dimension			Nominal dimension					— /
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		1/2
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

7	LG105R-2.5-盖板	2010C0Y01AV	1	PA66	
6	LG105R-2.54-隔板	2010H4Y01AV	P-1	PA66	
5	LC3-5.08-螺丝	SP0YA256501V	P	碳钢	三价铬钝化彩锌
4	LG105RB-焊脚	2010B0002AV	P	紫铜	镀锡
3	LC3-5.08-压块	1009B0001AV	P	碳钢	三价铬钝化彩锌
2	LC3-5.08-铁方盒	F1A0ALC1031V	P	碳钢	三价铬钝化彩锌
1	LG105R-5.08-主体	2034A0Y01AV	P	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE	11-03-25	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				DWG NO.	SP-2-2034004
				REV:	V0
				TITLE	LG105RB-7.62-XXP-1Y-00A
					LG105RB-7.62-成品

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行		

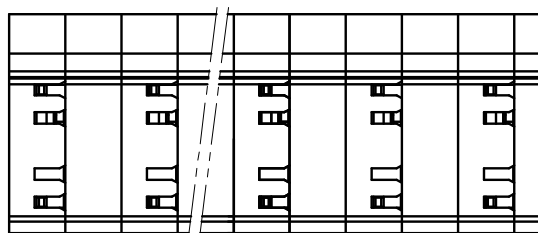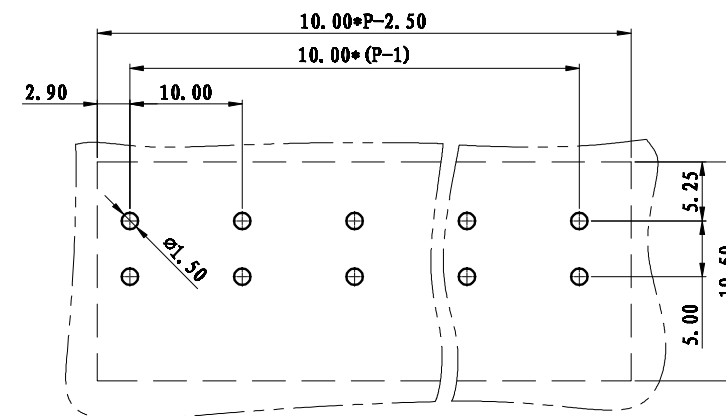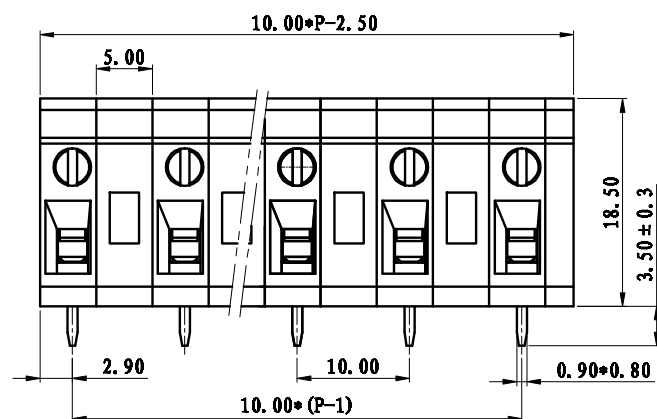

技术要求:
 间距: 10.0mm
 额定电压: 300V
 额定电流: 24A
 耐电压值: AC2500V/min
 绝缘阻抗: 500MΩ/DC500V
 使用条件: -40℃~+105℃
 适用线规: 30~12AWG
 螺丝扭矩: 0.4 N.m

NOTES:
 Pitch: 10.0mm
 Rated Voltage: 300V
 Rated Current: 24A
 Withstand Voltage:
 AC2500V for 1 minute
 Insulation Resistance:
 500MΩ / DC500V
 Using Temperature Range:
 -40℃ ~ +105℃
 Wire range: 30~ 12AWG
 Screw Torque Value: 0.4 N.m

	pitch dimension			Nominal dimension					
	over	over	over	over	over	over	over	over	—
variable	0	6	10	0	30	60	100	150	□
range	to	to	to	to	to	to	to	to	○
	6	10	24	30	60	100	150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

7	LG105-2.5-盖板	2010C0Y01AV	1	PA66	
6	LG105R-5.0-隔板	2046H0Y01AV	P-1	PA66	
5	LC3-5.08-螺丝	SP0YA256501V	P	碳钢	三价铬钝化彩锌
4	LG105RB-焊脚	2010B0002AV	P	紫铜	镀锡
3	LC3-5.08-压块	1009B0001AV	P	碳钢	三价铬钝化彩锌
2	LC3-5.08-铁方盒	F1A0ALC1031V	P	碳钢	三价铬钝化彩锌
1	LG105-5.0-主体	2010A0Y01AV	P	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE	11-03-25	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				DWG NO.	SP-2-2010006
				REV:	V0
				TITLE	LG105RB-10.0-成品

上海联捷电气有限公司
 Shanghai Blinker Electric CO., LTD