

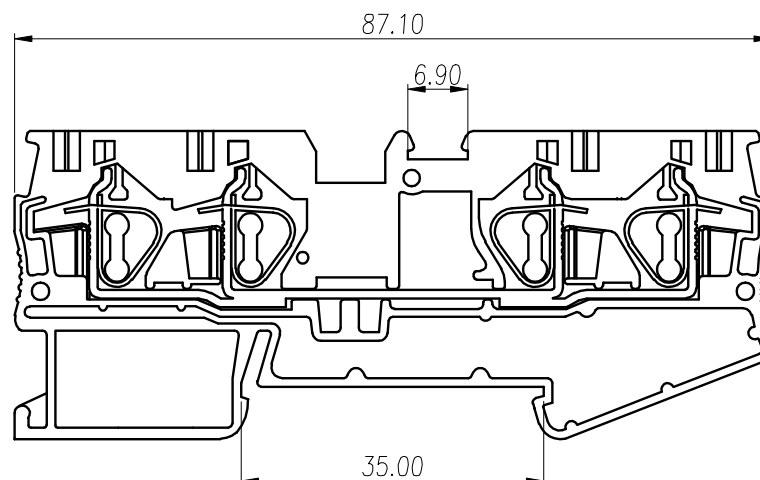


REVISION		RECORD	
REV.	CONTENT	MOD.	DATE
①	初版发行		

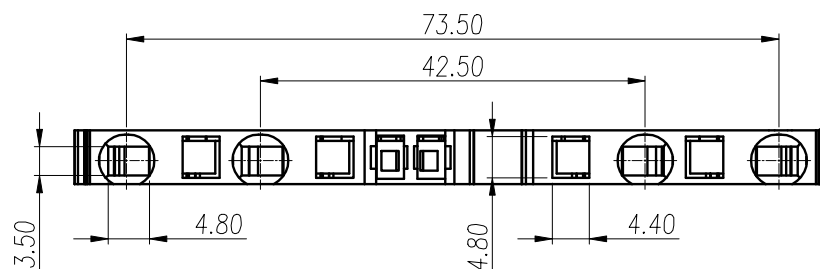

技术要求:

1. 额定电压: 800V, 额定电流: 32A
2. 耐电压值: AC 3500V/min
3. 使用条件: $-40^{\circ} - +105^{\circ}$
4. 适用线径: 4mm^2

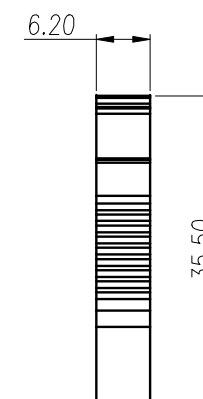

	pitch dimension			Nominal dimension					—
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		▱ ⌒
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	STL-4/2L-弹片		F2A0DSTL25BV		4	不锈钢	
2	STL-4/2L-导电件		6STLB00001AV		1	黄铜	镀锌
1	STL-4/2L-主体		6STLA100320V		1	PC	灰色
NO.	NAME OF PART		NO. OF PART		Q'TY	MATERIAL	NOTES
DES.	ZD	DATE	18-11-22	UNITS	MM		SHEET
CHK.		DATE		SIZE	A4		1 of 1
APP.		DATE		SCALE	1:1		
 上海联捷电气有限公司 Shanghai Blinker Electric C.O.,LTD						TITLE	STL-4/2L-1P-110-00A
							STL-4/2L-成品