
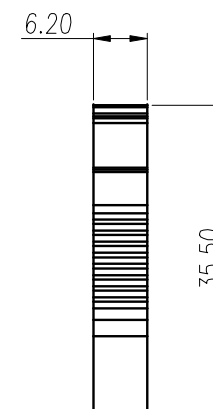
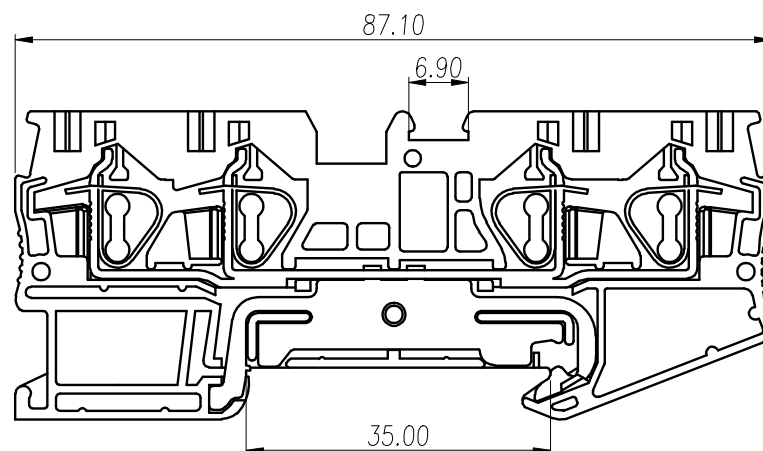


REVISION		RECORD	
REV.	CONTENT	MOD.	DATE
1	初版发行		

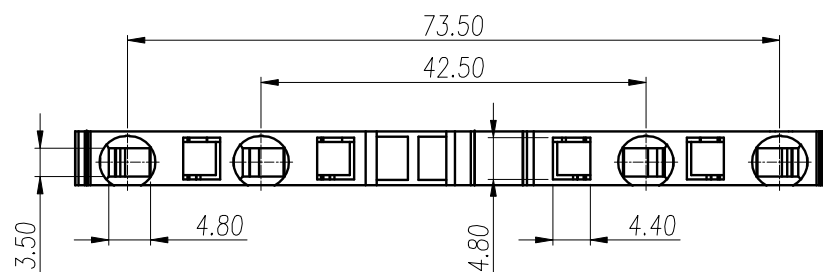

技术要求:

1. 额定电压: 800V, 额定电流: 32A
2. 耐电压值: AC 3500V/min
3. 使用条件: $-40^{\circ} - +105^{\circ}$
4. 适用线径: 4mm^2

	pitch dimension			Nominal dimension					—
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	STL-4/2L-弹片	F2A0DSTL25BV	4	不锈钢	
2	STL-4/2L-PB-导电件	6STLB00002AV	1	黄铜	镀镍
1	STL-4/2L-PB-主体	6STLA0Y0320V-1	1	PC	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	2D	DATE 18-11-22	UNITS	MM	THIRD ANGLE PROJECTION
CHK.		DATE	SIZE	A4	1 of 1
APP.		DATE	SCALE	1:1	DWG NO. SP-2-6STLPE REV: V0
 上海联捷电气有限公司 Shanghai Blinker Electric C.O., LTD				TITLE	STL-4/2L-PB-1P-1Y-00A STL-4/2L-PB-成品