

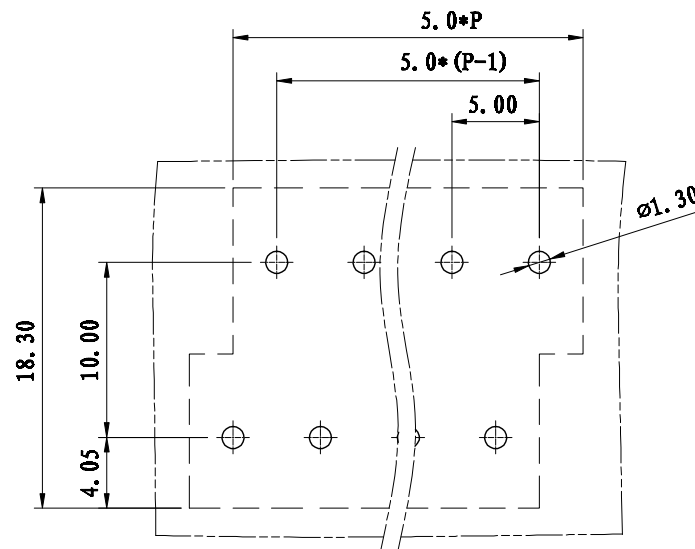
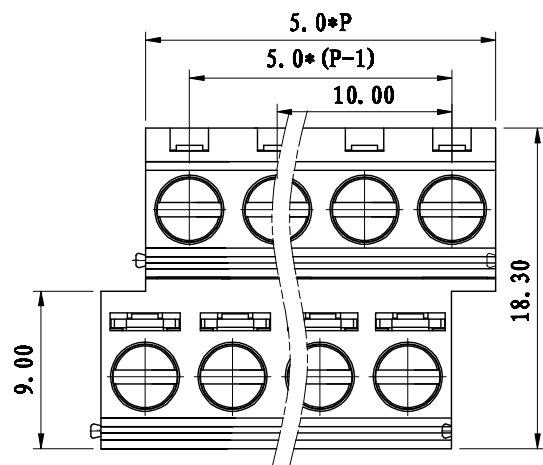


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行	ARKINE	

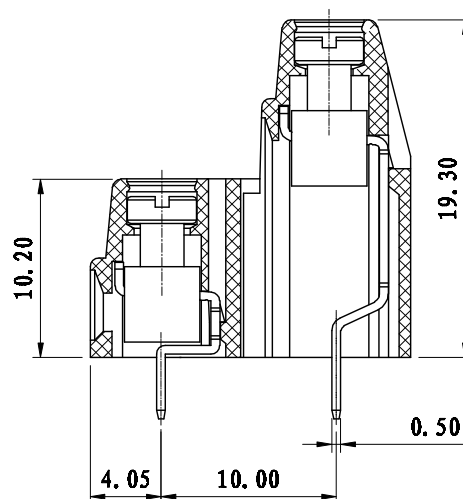

NOTES:

1. Voltage Rating: 300V, Current Rating: 18A
2. PITCH: 5.0mm
3. Insulation Withstands Voltage: AC2500V/min
4. Insulation Resistance: 500M Ω or more at DC500V
5. Using Temperature Range: -40 $^{\circ}$ C ~ +105 $^{\circ}$ C
6. Suitable Electric Wire: 26-16AWG
7. Screw Torque Value: 0.6 N.m

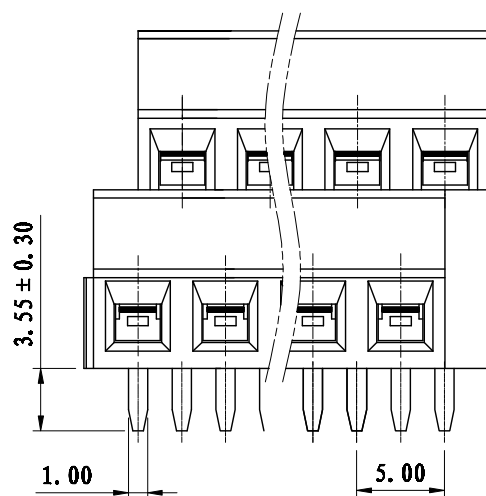




技术要求:

1. 额定电压: 300V, 额定电流: 18A
2. 间距: 5.0mm
3. 耐电压值: AC 2500V/min
4. 绝缘阻抗500兆欧
5. 使用条件: -40° - +105°
6. 适用线规: 26-16AWG
7. 螺丝扭力: 0.6 N.m

	pitch dimension			Nominal dimension					—
variable range	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	 
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3.	LG127V-焊剂		2001B0001AV		P	黄铜	镀锡
4.	LG127H-焊剂		2001B0002AV		P	黄铜	镀锡
3.	LG127-螺丝		SP0YA253701Y		2P	黄铜	三价铬钝化彩锌
2.	LG127-铜方块		F1A0BLG1273V		2P	碳钢	镀锌
1.	LG127HA-5.0-本体		2024A0YXXAV		1	PA66-V0	
NO.	NAME OF PART		NO. OF PART		Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE	2010/5/24	UNITS	MM	THIRD ANGLE PROJECTION	SHEET
CHK.		DATE		SIZE	A4		1 of 1
APP.		DATE		SCALE	1:1		DWG NO. SP-2-2004001
 上海联捷电气有限公司 Shanghai Bliker Electric C.O.,LTD						TITLE	LG127AH-5.0-XP-1Y-00 LG127AH-5.0-成品

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行	ARKINE	


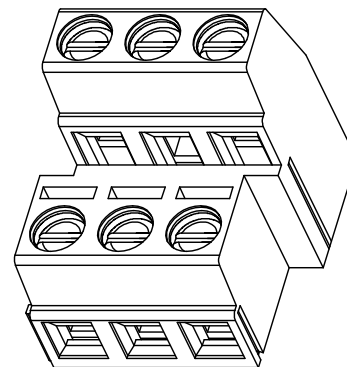
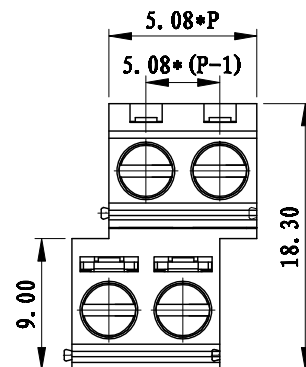
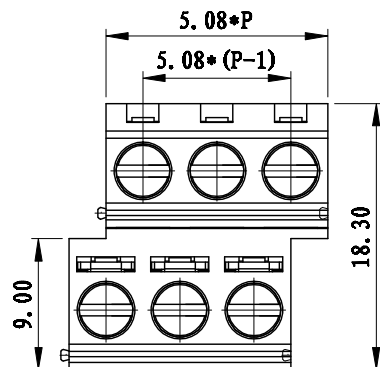


NOTES:

1. Voltage Rating: 300V, Current Rating: 18A
2. PITCH: 5.08mm
3. Insulation Withstands Voltage: AC2500V/min
4. Insulation Resistance: 500MΩ or more at DC500V
5. Using Temperature Range: -40° C - +105° C
6. Suitable Electric Wire: 26-16AWG
7. Screw Torque Value: 0.4 N.m

技术要求:

1. 额定电压: 300V, 额定电流: 18A
2. 间距: 5.08mm
3. 耐电压值: AC 2500V/min
4. 绝缘电阻: 500兆欧
5. 使用条件: -40° - +105°
6. 适用线规: 26-16AWG
7. 螺丝扭力: 0.4 N.m

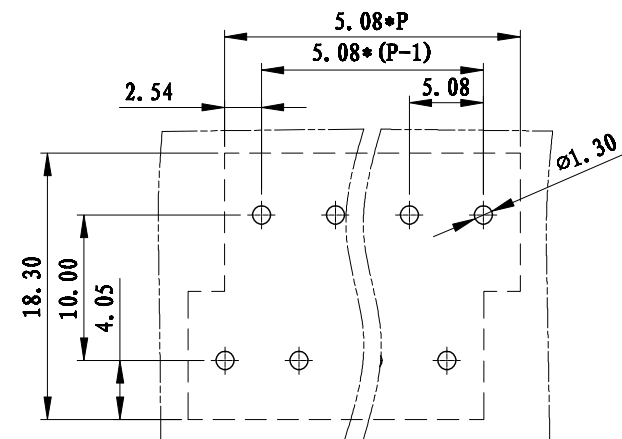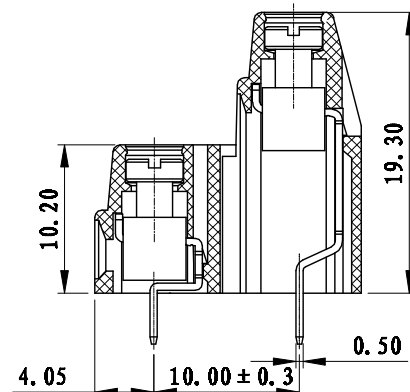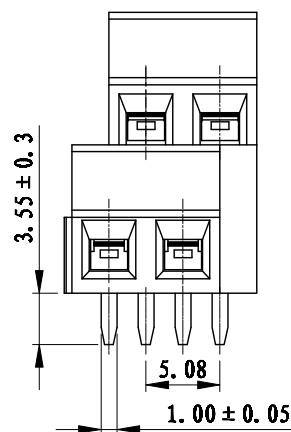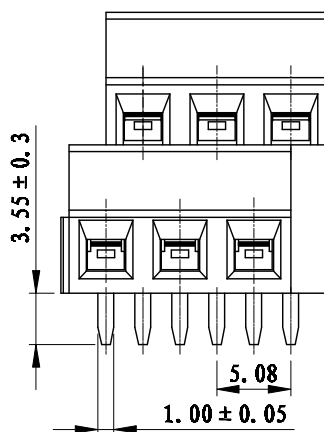

	pitch dimension			Nominal dimension					
variable range	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5.	LG127V-焊脚	2001B0001AV	P	黄铜	镀雾锡
4.	LG127H-焊脚	2001B0002AV	P	黄铜	镀雾锡
3.	LG127-螺丝	SP0YA253701V	2P	碳钢	三价铬钝化彩锌
2.	LG127H-铜方块	F1A0BLG1273V	2P	黄铜	镀镍
1.	LG127HA-5.08-本体	2001A0YXXAV	1	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE 2011/03/02	UNITS	MM	THIRD ANGLE PROJECTION
CHK.		DATE	SIZE	A4	1 of 1
APP.		DATE	SCALE	1:1	DWG NO. SP-2-2004001 REV: V0
上海联捷电气有限公司 Shanghai Hlinker Electric C.O., LTD				TITLE	LG127AH-5.08-XP-1Y-00A LG127AH-5.08-成品